

QuickSpecs

HP Z2 Mini G4 Workstation

Overview

HP Z2 Mini G4 Workstation




Front View

1. Power Button
2. Headphones/Microphone combo port
3. 1 USB 3.0 Battery Charging Port
4. 1 USB 3.0 Port
5. 1 USB 3.1 Gen2 Type-C™ Battery Charging Port

QuickSpecs

HP Z2 Mini G4 Workstation

Overview

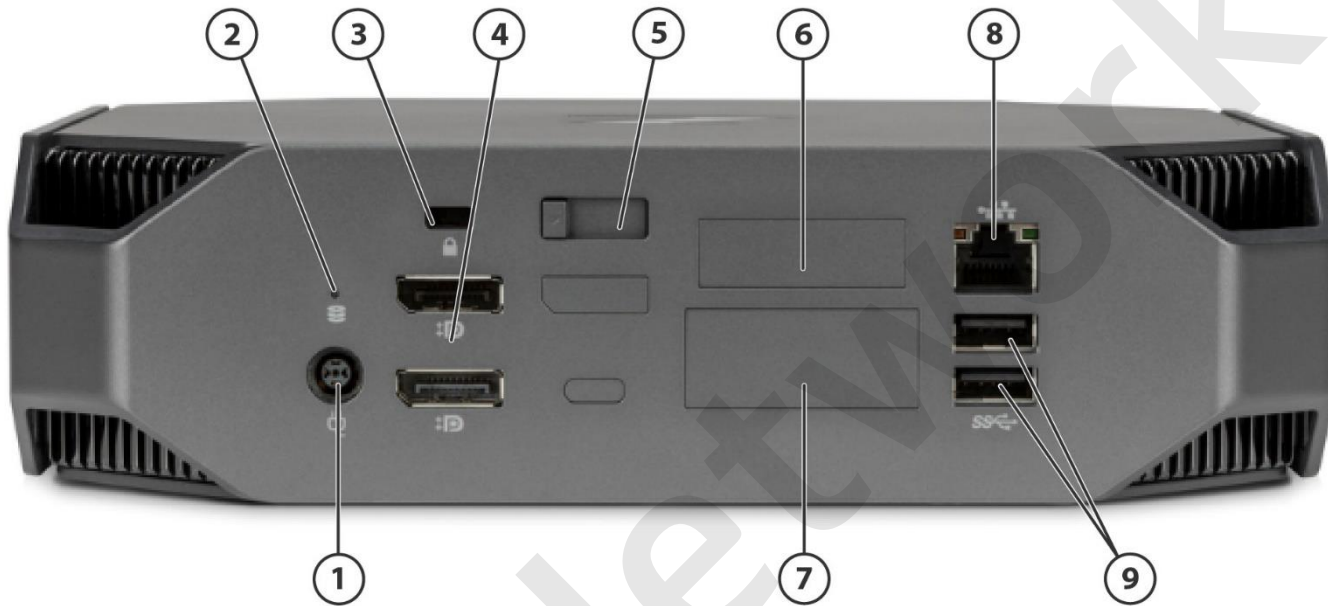


HP Z2 Mini G4 Entry, back view

1. DC In
2. HDD LED Status
3. Security Slot
4. (2) DisplayPorts™
5. Cover Latch
6. Optional Serial Port
7. Optional Flexible IO: Not loaded (Flex IO supports VGA/HDMI/DisplayPort™/2nd RJ-45/Fiber NIC/USB-C™ 3.1 Gen2 Charging Port with Alt mode)
8. RJ-45 (Ethernet)
9. (2) USB 3.0 Ports

QuickSpecs

HP Z2 Mini G4 Workstation

Overview

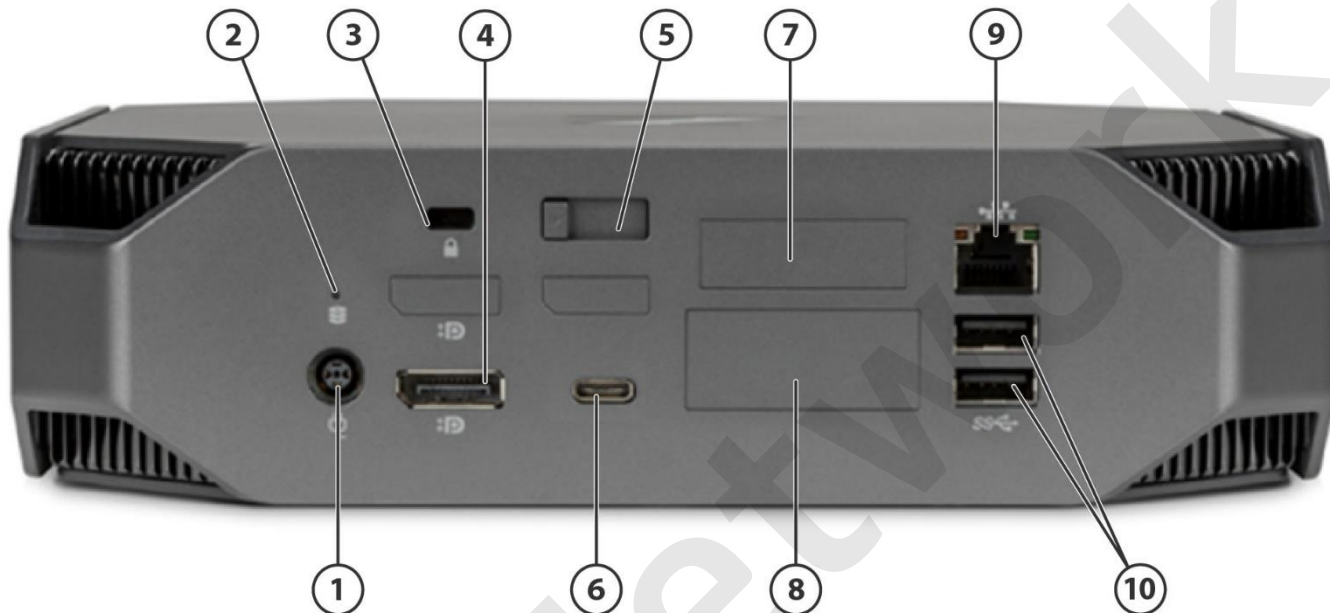


HP Z2 Mini G4 Performance with no discrete graphics, back view

- | | |
|------------------------------|--|
| 1. DC Power Plug | 7. Optional Serial Port |
| 2. HDD LED status | 8. Optional Flex-Port: No Load (Options include:
VGA/HDMI/DisplayPort™/2nd RJ-45/USB-C™ 3.1 Gen 2
Charging Port with Alt mode) |
| 3. Kensington Lock slot | RJ-45 (Ethernet) |
| 4. (1) DisplayPort™ Port | 9. RJ-45 (Ethernet) |
| 5. Cover latch | 10. (2) USB 3.0 Ports |
| 6. USB 3.1 Gen2 Type-C™ Port | |

QuickSpecs

HP Z2 Mini G4 Workstation

Overview

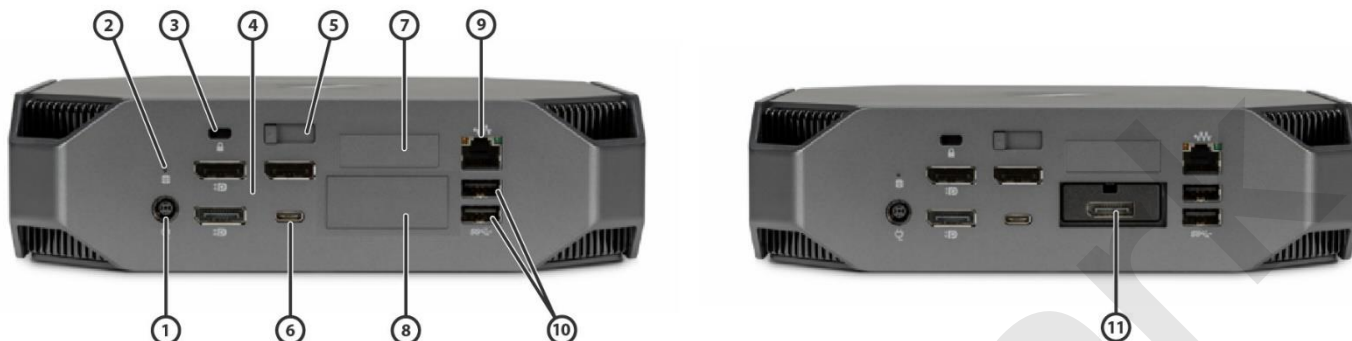

HP Z2 Mini G4 Performance with discrete graphics, back view


- | | |
|--|---|
| <ol style="list-style-type: none"> 1. DC Power Plug 2. HDD LED status 3. Kensington Lock slot 4. (3) DisplayPort™ Port 5. Cover latch 6. USB 3.1 Gen2 Type-C™ Port | <ol style="list-style-type: none"> 7. Optional Serial Port 8. Optional Flex-Port: No Load (Options include: VGA/HDMI/DisplayPort™/2nd RJ-45/USB-C™ 3.1 Gen 2 Charging Port with Alt mode) 9. RJ-45 (Ethernet) 10. (2) USB 3.0 Ports 11. Optional Flex-Port: DisplayPort™ (Options include: VGA/HDMI/DisplayPort™/2nd RJ-45/USB-C™ 3.1 Gen 2 Charging Port with Alt mode/No Load) |
|--|---|

	Mini Entry	Mini Performance – no Nvidia/AMD graphics	Mini Performance – Nvidia/AMD graphics
DisplayPort™ Ports	2	1	3
Flex IO Port DisplayPort™ Port	1	1	1
Total possible DisplayPorts™ with Flex IO Port set as DisplayPort™	3	2	4

QuickSpecs

HP Z2 Mini G4 Workstation

Overview

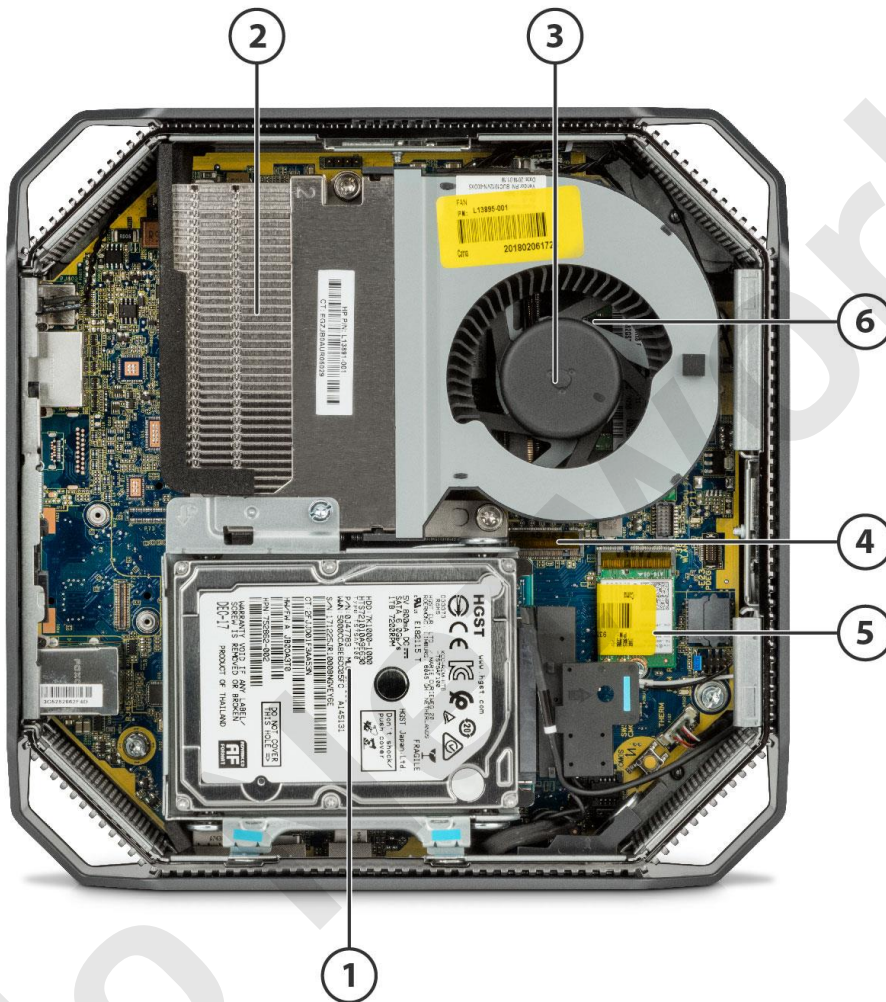


HP Z2 Mini G4 Entry, Internal View

1. SATA HDD/SSD (9.5mm 2.5")
2. CPU heatsink
3. CPU blower
4. M.2 80mm (PCIe SSD)
5. M.2 30mm WLAN/BT (location change, TBD)
6. (2) SODIMM memory slots

QuickSpecs

HP Z2 Mini G4 Workstation

Overview

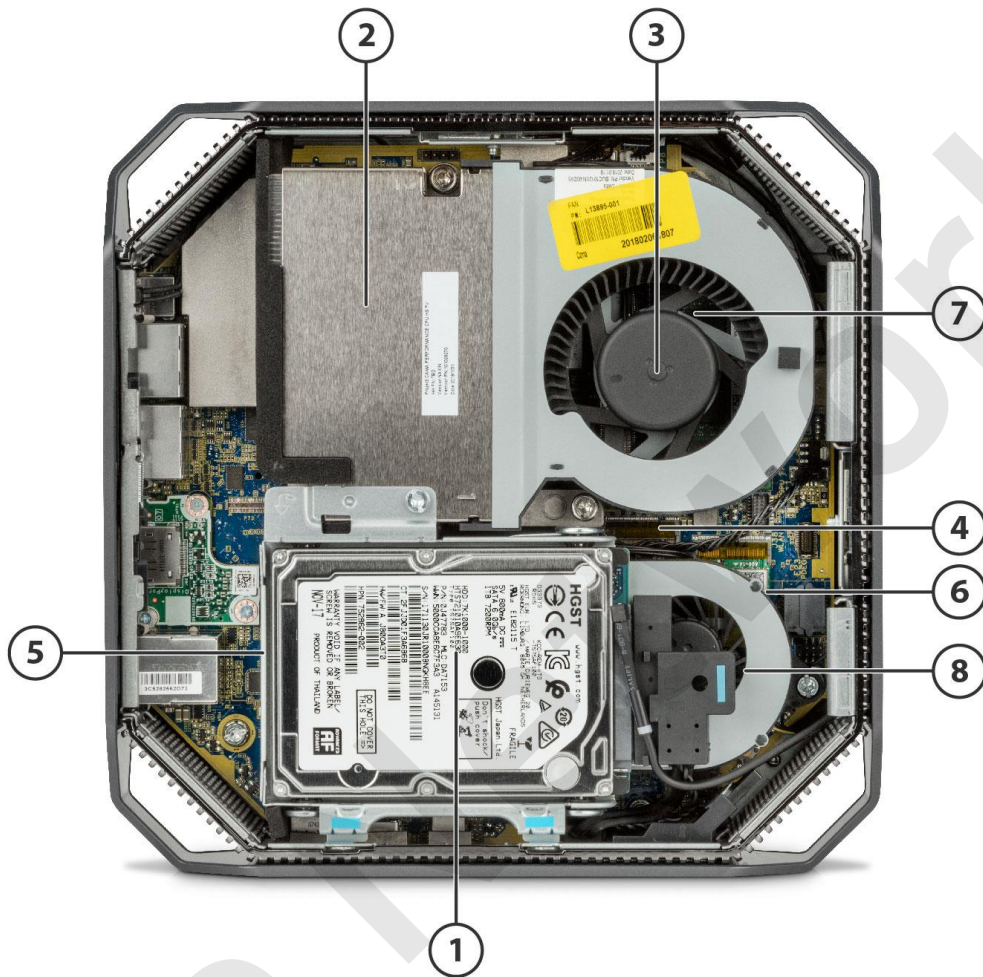

HP Z2Mini G4 Performance, Internal View

1. SATA HDD/SSD (9.5mm 2.5")
2. CPU heatsink
3. CPU blower
4. M.2 30mm WLAN/BT (location change, TBD)
5. GPU heatsink (underneath HDD/SSD cage)
6. M.2 30mm WLAN/BT (location change, TBD)
7. (2) SODIMM memory slots
8. GPU blower

QuickSpecs

HP Z2 Mini G4 Workstation

Overview



HP Z2 G4 Mini, bottom view

Removable bottom feet for access to integrated VESA mounting holes

QuickSpecs

HP Z2 Mini G4 Workstation

Overview

Form Factor

Mini Form Factor

Operating Systems

Preinstalled:

- Windows 10 Home¹
- Windows 10 Pro¹
- Windows 10 Pro (National Academic License)¹
- Windows 10 Pro for Workstations – HP recommends Windows 10 Pro¹
- HP Linux[®]-ready

Supported:

- Red Hat[®] Enterprise Linux Workstation (1 year paper license available; Preinstall not available)

Notes: For detailed OS/hardware support information for Linux, see:
http://www.hp.com/support/linux_hardware_matrix

- Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS update to take full advantage of Windows functionality. Windows 10 is automatically updated, which is always enabled. ISP fees may apply and additional requirements may apply over time for updates. See <http://www.windows.com>

QuickSpecs

HP Z2 Mini G4 Workstation

Overview

Processors*

Name	Cores	Clock Speed (GHz)	Intel® Turbo Boost Technology ³	Cache (MB)	Memory Speed (MT/s)	Hyper-Threading	Integrated Graphics	Featuring Intel® vPro™ Technology ⁴	16GB Intel® Optane™ memory ²	TDP (W)
Z2 Mini G4 Performance base unit										
Intel® Xeon® processor E-2286G ¹	6	4.0	4.9	12	2666	Y	Intel® UHD Graphics P630	Y	N	95W
Intel® Xeon® processor E-2278G ¹	8	3.4	5.0	16	2666	Y	Intel® UHD Graphics P630	Y	N	80W
Intel® Xeon® processor E-2276G ¹	6	3.8	4.9	12	2666	Y	Intel® UHD Graphics P630	Y	N	80W
Intel® Xeon® processor E-2274G ¹	4	4.0	4.9	8	2666	Y	Intel® UHD Graphics P630	Y	N	80W
Intel® Xeon® processor E-2244G ¹	4	3.8	4.8	8	2666	Y	Intel® UHD Graphics P630	Y	N	80W
Intel® Xeon® processor E-2236 ¹	6	3.4	4.8	12	2666	Y	N/A	Y	N	80W
Intel® Xeon® processor E-2226G ¹	6	3.4	4.7	12	2666	Y	Intel® UHD Graphics P630	Y	N	80W
Intel® Xeon® processor E-2224G ¹	4	3.4	4.6	8	2666	Y	Intel® UHD Graphics P630	Y	N	80W
Intel® Xeon® processor E-2176G ¹	6	3.7	4.7	12	2666	Y	Intel® UHD Graphics P630	Y	N	80W
Intel® Xeon® processor E-2174G ¹	4	3.8	4.7	8	2666	Y	Intel® UHD Graphics P630	Y	N	71W
Intel® Xeon® processor E-2144G ¹	4	3.6	4.5	8	2666	Y	Intel® UHD Graphics P630	Y	N	71W
Intel® Xeon® processor E-2136 ¹	6	3.3	4.5	12	2666	Y	N/A	Y	N	80W
Intel® Xeon® processor E-2126G ¹	6	3.3	4.5	12	2666	N	Intel® UHD Graphics P630	Y	N	80W
Intel® Xeon® processor E-2124G ¹	4	3.4	4.3	8	2666	N	Intel® UHD Graphics P630	Y	N	71W
Intel® Xeon® processor E-2104G ¹	4	3.2	N/A	8	2666	N	Intel® UHD Graphics P630	Y	N	65W
Intel® Core™ i9-9900K processor ^{1,2}	8	3.6	5.0	16	2666	Y	Intel® UHD Graphics 630	Y	Y	95W
Intel® Core™ i9-9900 processor ^{1,2}	8	3.1	5.0	16	2666	Y	Intel® UHD Graphics 630	Y	Y	65W
Intel® Core™ i7-9700K processor ^{1,2}	8	3.6	4.9	12	2666	N	Intel® UHD Graphics 630	Y	Y	95W
Intel® Core™ i7-9700 processor ^{1,2}	8	3.0	4.7	12	2666	N	Intel® UHD Graphics 630	Y	Y	65W
Intel® Core™ i5-9600 processor ^{1,2}	6	3.1	4.6	9	2666	Y	Intel® UHD Graphics 630	Y	Y	65W

QuickSpecs

HP Z2 Mini G4 Workstation

Overview

Intel® Core™ i5-9500 processor ^{1,2}	6	3.0	4.4	9	2666	Y	Intel® UHD Graphics 630	Y	Y	65W
Intel® Core™ i3-9100 processor ¹	4	3.6	4.2	8	2666	Y	Intel® UHD Graphics 630	Y	N	65W
Intel® Core™ i7-8700 processor ¹	6	3.2	4.6	12	2666	Y	Intel® UHD Graphics 630	Y	Y	65W
Intel® Core™ i5-8500 processor ¹	6	3.0	4.0	9	2666	N	Intel® UHD Graphics 630	Y	Y	65W
Intel® Core™ i3-8100 processor ¹	4	3.6	N/A	6	2400	N	Intel® UHD Graphics 630	N	N	65W
Intel® Pentium™ G5400 processor ¹	2	3.7	N/A	4	2400	Y	Intel® UHD Graphics 610	N	N	54W
Z2 Mini G4 Entry base unit										
Intel® Xeon® processor E-2104G ¹	4	3.2	N/A	8	2666	N	Intel® UHD Graphics P630	Y	N	65W
Intel® Core™ i7-8700 processor ¹	6	3.2	4.6	12	2666	Y	Intel® UHD Graphics 630	Y	Y	65W
Intel® Core™ i5-8500 processor ¹	6	3.0	4.0	9	2666	N	Intel® UHD Graphics 630	Y	Y	65W
Intel® Core™ i3-8100 processor ¹	4	3.6	N/A	6	2400	N	Intel® UHD Graphics 630	N	N	65W
Intel® Pentium™ G5400 processor ¹	2	3.7	N/A	4	2400	Y	Intel® UHD Graphics 610	N	N	54W

¹Multicore is designed to improve performance of certain software products. Not all customers or software applications will necessarily benefit from use of this technology. Performance and clock frequency will vary depending on application workload and your hardware and software configurations. Intel's numbering, branding and/or naming is not a measurement of higher performance.

²Intel® Optane™ memory system acceleration does not replace or increase the DRAM in your system.

³The specifications shown in the Intel® Turbo Boost Technology column represent the maximum turbo frequency with one core active. Turbo boost stepping occurs in 100MHz increments. Processors that do not have turbo functionality are denoted as N/A. Intel® Turbo Boost performance varies depending on hardware, software and overall system configuration. See <http://www.intel.com/technology/turboboost> for more information.

⁴vPro. Some functionality of this technology, such as Intel® Active management technology and Intel® Virtualization technology, requires additional 3rd party software in order to run. Availability of future "virtual appliances" applications for Intel vPro technology is dependent on third-party software providers. Compatibility of this generation of Intel vPro technology-based hardware with future "virtual appliances" is yet to be determined.

NOTES:

Integrated Intel® UHD graphics P630 is supported on select Intel® Xeon® E processors.

Intel® Xeon® E, Intel® Core™ i3 and Pentium can support either ECC or non-ECC memory; Intel® Core™ i5/i7 processors only support non-ECC memory.

NOTE: In accordance with Microsoft's support policy, HP does not support the Windows 8 or Windows 7 operating system on products configured with Intel and AMD 7th generation and forward processors or provide any Windows 8 or Windows 7 drivers on <http://www.support.hp.com>.

QuickSpecs

HP Z2 Mini G4 Workstation

Overview

Color	Space grey with black chrome accents
Convertibility	The Z2Mini G4 can either be placed flat on the desktop or mounted behind a display* or under a desk. * Mounting hardware sold separately.
Expansion Slots (see system board section for more details)	1 MXM slot (PCIe Gen3 x16) * 1 80mm M.2 Storage slot (PCIe Gen3 x4) 1 30mm M.2 WLAN slot (PCIe Gen3 x1 / Intel CNVI) ** * Performance only ** For WLAN/BT M.2 module only
Expansion Bays (see system board section for more details)	1 internal 2.5" bay (for SATA HDDs & SSDs only)
Front I/O	Power button
Slide I/O	1 USB-A 3.0 Charging Data Port, 1 USB 3.0 data port, combo headset/microphone port and 1 USB-C 3.1 Gen2 Charging Data Port.
Rear I/O	Z2 Mini G4 Entry: 2 DisplayPort™ (DP 1.2) outputs from Intel® UHD graphics, 2 USB 3.0 ports, 1 serial port (optional), RJ-45 (LOM) 1 Flexible module port output (Optional Flexible module required) Z2 Mini G4 Performance¹: 3 DisplayPort™ (DP 1.2) outputs from discrete graphic module, 2 USB-A 3.0 ports, 1 USB 3.1 G2 Type-C™ ports, 1 serial port (optional), RJ-45 (LOM) 1 Flexible module port output (Optional Flexible module required) NOTE 1: Performance system is capable of supporting 6 displays. 6 display solution is achieved using a combination of Intel® UHD graphics and discrete graphics and is ONLY supported on Windows 10.
Chassis Dimensions (H x W x D)	Standard desktop orientation: 58 x 216 x216 mm (2.28 x 8.5 x 8.5 in)
Weight	Exact weights depend upon configuration; Minimum Weight: 1.93 kg (4.25 lb) Typical Weight*: 2.18 kg (4.80 lb) Maximum Weight: 2.23 kg (4.91 lb) Max Supported Weight (desktop orientation): 35 kg (77 lb) * Configured with 1 2.5" hard drive, 1 PCIe SSD, WLAN module, 2 DIMMs and 1 NVIDIA® Quadro® graphics card
Power Supply	Z2 Mini G4 Entry: 135W 89% Efficiency Z2 Mini G4 Performance: 200W 89% Efficiency 230W 89% Efficiency NOTES: Customers placing their system in an enclosure should design their solution to accommodate the size of the external power supply for the Z2 Mini G4
Chipset	Intel® C246 chipset
Memory	2 SODIMM slots, supporting up to 64GB ECC/non-ECC, DDR4 2666 MT/s The CPUs determine the speed at which the memory is clocked. If a 2666 MT/s capable CPU is used in the system, the maximum speed the memory will run at is 2666 MT/s regardless of the specified speed of the memory. Note: Transfer rates up to 2666MT/s

QuickSpecs

HP Z2 Mini G4 Workstation

Overview

Workstation ISV Certifications

See the latest list of certifications at
<http://www.hp.com/united-states/campaigns/workstations/partnerships.html>

Solo Network

QuickSpecs

HP Z2 Mini G4 Workstation

Supported Components

Processors

	Factory Configured	Option Kit
Intel® Xeon® processor E-2100 family²		
Intel® Xeon® processor E-2286G	Y	N
Intel® Xeon® processor E-2278G	Y	N
Intel® Xeon® processor E-2276G	Y	N
Intel® Xeon® processor E-2274G	Y	N
Intel® Xeon® processor E-2244G	Y	N
Intel® Xeon® processor E-2236	Y	N
Intel® Xeon® processor E-2226G	Y	N
Intel® Xeon® processor E-2224G	Y	N
Intel® Xeon® processor E-2176G ¹	Y	N
Intel® Xeon® processor E-2174G ¹	Y	N
Intel® Xeon® processor E-2144G ¹	Y	N
Intel® Xeon® processor E-2136 ¹	Y	N
Intel® Xeon® processor E-2124G ¹	Y	N
Intel® Xeon® processor E-2104G	Y	N
9th generation Intel® Core™ processor family		
Intel® Core™ i9-9900K 3.6 2666 8C CPU	Y	N
Intel® Core™ i9-9900 3.1 2666 8C CPU	Y	N
Intel® Core™ i7-9700K 3.6 2666 8C CPU	Y	N
Intel® Core™ i7-9700 3.0 2666 8C CPU	Y	N
Intel® Core™ i5-9600 3.1 2666 6C CPU	Y	N
Intel® Core™ i5-9500 3.0 2666 6C CPU	Y	N
Intel® Core™ i3-9100 3.6 2666 4C CPU	Y	N
8th generation Intel® Core™ processor family³		
Intel® Core™ i7-8700 3.2 2666 6C CPU	Y	N
Intel® Core™ i5-8500 3.0 2666 6C CPU	Y	N
8th generation Intel® Core™ i3/Pentium processor family²		
Intel® Core™ i3-8100 3.6 2400 4C CPU	Y	N
Intel® Pentium® G5400 3.7 2400 2C CPU	Y	N

NOTE 1: Only supported on Z2 Mini G4 Performance Base Unit

NOTE 2: These processor support either ECC or non-ECC memory

NOTE 3: These processors support only non-ECC memory

NOTE 4: Intel® Integrated Graphics P630 for Xeon® processors supports workstation-specific graphics drivers for improved compatibility and performance on select professional applications, compared to Intel® UHD Graphics 630.

NOTE 5: Intel® Optane™ memory system acceleration does not replace or increase the DRAM in your system.

Monitors / Displays

	Factory Configured	Option Kit	Option Kit Part Number
HP Z Display Z27n G2 27-inch IPS LED Backlit Monitor		Y	1J510AA
HP Z Display Z24n G2 24-inch IPS LED Backlit Monitor		Y	1J509AA

QuickSpecs

HP Z2 Mini G4 Workstation

Supported Components

HP Z Display Z24nf G2 23.8-inch IPS Backlit Monitor	Y	1JS07AA
HP Z Display Z23n G2 23-inch IPS LED Backlit Monitor	Y	1JS06AA
HP Z Display Z22n G2 21.5-inch IPS LED Backlit Monitor	Y	1JS05AA

Notes

Supported by all Operating Systems available from HP
Screen Size Diagonally Measured

Solo Network

QuickSpecs

HP Z2 Mini G4 Workstation

Supported Components

SATA Hard Drives		Factory Configured	Option Kit	Option Kit Part Number
	500GB SATA 7200 rpm 6Gb/s SFF HDD	Y	Y	T0K73AA
	1TB SATA 7200 rpm 6Gb/s SFF HDD	Y	Y	T0K74AA
	2 TB SATA 5400 rpm SFF HDD	Y	N	
SATA Solid State Drives	HP 256GB SATA 6Gb/s SSD	Y	Y	A3D26AA
	Storage Acceleration			
	16GB Intel® Optane™ memory*	Y	Y	2EB68AA

*Intel® Optane™ memory (cache) is sold separately. Intel® Optane™ memory system acceleration does not replace or increase the DRAM in your system. Available for HP commercial desktops and notebooks and for select HP workstations (HP Z2 Tower/SFF/Mini G4, ZBook Studio, 15 and 17 G5) and requires a SATA HDD, 7th Gen or higher Intel® Core™ processor or Intel® Xeon® processor E3-1200 V6 product family or higher, BIOS version with Intel® Optane™ supported, Windows 10 version 1703 or higher, M.2 type 2280-S1-B-M connector on a PCH Remapped PCIe Controller and Lanes in a x2 or x4 configuration with B-M keys that meet NVMe™ Spec 1.1, and an Intel® Rapid Storage Technology (Intel® RST) 16.5 driver.

PCIe SSDs	PCIe SSDs for HP Workstations*	Factory Configured	Option Kit	Option Kit Part Number
	HP Z Turbo Drive G2 256GB TLC (Z2 Mini G4)	Y	Y	Y7B60AA
	HP Z Turbo Drive G2 512GB TLC (Z2 Mini G4)	Y	Y	5SA16AA/AT
	HP Z Turbo Drive G2 1TB TLC (Z2 Mini G4)	Y	Y	5RR60AA
	HP Z Turbo Drive G2 2TB TLC (Z2 Mini G4)	Y	Y	3KP44AA
	HP Z Turbo Drive G2 256GB SED TLC (Z2Mini G4)	Y	Y	5RR63AA
	HP Z Turbo Drive G2 512GB SED TLC (Z2 Mini G4)	Y	Y	5RR64AA
	HP Z Turbo Drive G2 1TB SED TLC (Z2 Mini G4)	Y	Y	6YT78AA

** Installed in native M.2 storage slot on Z2 Mini G4 motherboard

*M.2 card heatsink is required for M.2 storage.

NOTE: For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows 10) of system disk is reserved for system recovery software.

Graphics		Factory Configured	Option Kit	Option Kit Part Number	Supported # of cards
Integrated Graphics	Integrated Intel® UHD Graphics (Z2G4)				
	Intel® UHD Graphics P630	Y	N		1
	Intel® UHD Graphics 630	Y	N		1
	Intel® UHD Graphics 610	Y	N		1
Discrete Graphics	NVIDIA® Quadro® P600 4GB Graphics ¹	Y	Y	3TQ28AA	1
	NVIDIA® Quadro® P1000 4GB Graphics ¹	Y	Y	3TQ30AA	1
	AMD Radeon™ Pro WX 3200 4GB Graphics ¹	Y	Y	6YT72AA	1
	AMD Radeon™ Pro WX 4150 4GB Graphics ^{1,2}	Y	Y	3TQ29AA	1

QuickSpecs

HP Z2 Mini G4 Workstation

Supported Components

Graphics DisplayPort™ Cable Adapters	HP DisplayPort™ To DVI-D Adapter	Y	Y	FH973AA
	HP DisplayPort™ To VGA Adapter	N	Y	AS615AA
	HP DisplayPort™ to Dual Link DVI Adapter	N	Y	NR078AA
	HP DisplayPort™ to HDMI Adapter	N	Y	TBD
	HP USB-C to VGA Adapter	N	Y	4SH06AA
	HP USB-C to HDMI Adapter	N	Y	4SH07AA
	HP USB-C to DP Adapter	N	Y	4SH08AA

Notes

NOTE 1: Only offered on Z2 Mini G4 Performance base unit

NOTE: Intermixing integrated Intel® UHD graphics and discrete graphics cards to drive more than three displays can be enabled using the Computer (F10) Setup Utility. However, HP recommends using only discrete graphics when four or fewer displays are required to be supported. 6 display solution is achieved using a combination of Intel® UHD graphics and discrete graphics and is ONLY supported on Windows 10.

QuickSpecs

HP Z2 Mini G4 Workstation

Supported Components

Memory

DDR4-2666 ECC Unbuffered SODIMMs - CTO

HP 8GB (1x8GB) DDR4-2666 ECC SODIMM
HP 16GB (2x8GB) DDR4-2666 ECC SODIMM
HP 32GB (2x16GB) DDR4-2666 ECC SODIMM
HP 64GB (2x32GB) DDR4-2666 ECC SODIMM

DDR4-2666 non-ECC Unbuffered SODIMMs - CTO

HP 4GB (1x4GB) DDR4-2666 nECC SODIMM
HP 8GB (2x4GB) DDR4-2666 nECC SODIMM
HP 8GB (1x8GB) DDR4-2666 nECC SODIMM
HP 16GB (2x8GB) DDR4-2666 nECC SODIMM
HP 32GB (2x16GB) DDR4-2666 nECC SODIMM
HP 64GB (2x32GB) DDR4-2666 nECC SODIMM

AMO

Option Kit Part Number

DDR4-2666 ECC Unbuffered SODIMMs - AMO

HP 8GB (1x8GB) DDR4-2666 ECC RAM	3TQ37AA
HP 16GB (1x16GB) DDR4-2666 ECC SODIMM	3TQ38AA
HP 32GB (1x32GB) DDR4-2666 ECC SODIMM	6FR90AA
HP 4GB (1x4GB) DDR4-2666 nECC RAM	3TQ34AA
HP 8GB (1x8GB) DDR4-2666 nECC RAM	3TQ35AA
HP 16GB (1x16GB) DDR4-2666 nECC RAM	3TQ36AA
HP 32GB (1x32GB) DDR4-2666 nECC SODIMM	6FR89AA

NOTES: Only unbuffered DDR4 SODIMMs are supported.

Intel® Xeon® E, Intel® Core™ i3 and Intel® Pentium® processors can support either ECC or non-ECC memory; Intel® Core™ i5/i7 processors only support non-ECC memory.

Two channels of DDR4 memory are supported. To realize full performance at least one DIMM must be inserted into each channel.

The CPUs determine the speed at which the memory is clocked. If a 2666 MT/s capable CPU is used in the system, the maximum speed the memory will run at is 2666 MT/s regardless of the specified speed of the memory.

Factory-configured CTO (xxxxxAV) and aftermarket AMO (xxxxxAA, xxxxxAT) HP memory part numbers designated as "2666" will be transitioned to use "3200" speed memory components. This does not affect HP part number availability, nor does it affect system performance or operation. All hardware configurations currently supporting HP memory part numbers designated as "2666" have been tested to work with "3200" memory and are fully supported by HP under standard support terms.

QuickSpecs

HP Z2 Mini G4 Workstation

Supported Components

Multimedia and Audio Devices	Factory Configured	Option Kit	Option Kit Part Number
Integrated Conexant CX20632 5.1 HAD Audio	Y	N	
<hr/>			
Optical and Removable Storage	Factory Configured	Option Kit	Option Kit Part Number
HP SlimTray Optical Drives			
HP External Ultra-Slim DVD-RW Drive	N	Y	Y3T76AA
<p>Actual speeds may vary. Does not permit copying of commercially available DVD movies or other copyright protected materials. Intended for creation and storage of your original material and other lawful uses. Double Layer discs can store more data than single layer discs. However, double-layer discs burned with this drive may not be compatible with many existing single-layer DVD drives and players.</p>			
<hr/>			
Networking and Communications	Factory Configured	Option Kit	Option Kit Part Number
Integrated Intel® I219LM PCIe GbE Controller (Intel® vPro™ with Intel® AMT 12.0)	Y	N	
Intel® 9560 Wireless LAN (802.11ac) and Bluetooth® 5 Module	Y	N	
Allied Telesis 1GbE LC Fiber 2pc Module	Y	N	
<p>NOTE 1: The integrated network connection is required to support Intel® vPro™ Technology. NOTE 2: If AMT is provisioned, then network teaming with the integrated LAN port is not possible. NOTE 3: "Gigabit" Ethernet indicates compliance with IEEE standard 802.3ab for Gigabit Ethernet, and does not connote actual operating speed of 1 Gb/sec. For high speed transmission, connection to a Gigabit Ethernet server and network infrastructure is required.</p>			
<hr/>			
Racking and Physical Security	Factory Configured	Option Kit	Option Kit Part Number
HP Keyed Cable Lock 10mm	N	Y	T1A62AA
Z2 Mini ePSU Sleeve	N	Y	3RW68AA
HP Z2 Mini Vertical Stand	N	Y	3RW66AA
HP Z2/Z4/Z6 G4 Depth Adjustable Fixed Rail Rack Kit	N	Y	2HW42AA
HP Z2 Mini/Z2 Tower/Z4/Z6 Depth Adjustable Fixed Rail Rack Kit	N	Y	2A8Y5AA
HP Z2 Mini Rack Tray Support Kit	N	Y	1A4W4AA
<hr/>			
Input Devices	Factory Configured	Option Kit	Option Kit Part Number
HP USB Optical Mouse	Y	Y	QY777AA
HP USB Hardened Mouse	Y	Y	P1N77AA
HP USB Business SlimCCID SmartCard Keyboard	Y	Y	

QuickSpecs

HP Z2 Mini G4 Workstation

Supported Components

HP USB Business Slim Keyboard	Y	Y	N3R87AA
HP USB Premium Keyboard	Y	Y	Z9N40AT
HP Wireless Business Slim Keyboard & Mouse	Y	Y	N3R88AA

Other Hardware

	Factory Configured	Option Kit	Option Kit Part Number
HP Serial Port Adapter	Y	N	PA716A
HP Z2 Mini G4 VESA Sleeve	N	Y	Y7B61AA
Z2 Mini G4 Z Display VESA Mount Solution - Current Displays	N	Y	N6N00AA*
Z2 Mini G4 Z Display VESA Mount Solution - Legacy Displays	N	Y	E5J35AA**

* Current: "n" displays. This mounting kit supports the following displays:

HP Z22n; HP Z232; HP Z23n; HP Z24n; HP Z24nf; HP Z24nq; HP Z25n; HP Z27n; HP DreamColor Z32x

** Legacy: "l" displays. This mounting kit supports the following displays:

HP Z24i; HP Z30i; HP DreamColor Z24x; HP DreamColor Z24x G2; HP Dreamcolor Z27x

Rear Module Options

	Factory Configured	Option Kit	
HP Flex IO module (VGA)	Y	Y	3TK80AA
HP Flex IO module (HDMI)*	Y	Y	3TK74AA
HP Flex IO module (DP)	Y	Y	3TK72AA
HP Flex IO module (USB-C)	Y	Y	4KY84AA
HP Flex IO module (Thunderbolt™ 3.0)	Y	Y	3TQ25AA
HP Flex IO module (1 GbE LAN)	Y	Y	3TQ26AA
HP Serial Port Mini module	Y	Y	3TQ27AA

*HP Flex IO module (HDMI) is only supported with Intel UHD graphics. The Z2 Mini G4 will automatically switch to Intel(R) UHD graphics on the Flex IO port when this module is inserted into the system.

Software

	Factory Configured	Option Kit	Support Notes
HP Performance Advisor	Y	N	See Note 1
HP Velocity	Y	N	
HP Client Security Software	Y	N	
HP Remote Graphics Software (RGS) 7.x	Y	N	
HP PC Hardware Diagnostics UEFI	Y	N	See Note 2

NOTE 1: Supports, and preinstalled with Windows 10 only. Also available as a free download from <http://www.hp.com/go/performanceadvisor>

NOTE 2: Windows OS only

Operating Systems

Windows 10 Home



QuickSpecs

HP Z2 Mini G4 Workstation

Supported Components

Windows 10 Pro

Windows 10 Pro (National Academic License)

Windows 10 Pro for Workstations – HP recommends Windows 10 Pro

Red Hat® Enterprise Linux® (RHEL) Workstation - Paper License (1yr)

NOTE: For detailed QS/hardware support information for Linux, see:
http://www.hp.com/support/linux_hardware_matrix

Solo Network

Supported Components

HP BIOS

Key features of the HP BIOS include:

- Deployment and manageability – HP BIOS provides several technologies that help integrate the HP Z2 G4 Workstation into the enterprise, such as PXE, remote recovery, remote configuration, remote control, and BIOS (F10) Setup support for 14 languages.
- Network firmware updates – Update your BIOS via the cloud or standardize on a BIOS version hosted on an Enterprise network.
- Stability – HP BIOS supports the HP stable product roadmap by releasing only critical BIOS changes to the factory and advanced change notification.
- UEFI specification version 2.6
- Absolute Persistence agent – For tracking and tracing services, available in select countries, separate software and purchase of a subscription is required.
- Thermal and power management – The HP BIOS provides and enables thermal and power management technologies so component temperatures are managed for high reliability and to assist in operating the HP Business Desktop computer in any enterprise environment.
- Acoustic performance – Industry leading acoustic emissions across the range of operating conditions.
- Serviceability – HP BIOS provides diagnostic and detailed service information.
- Upgrades and recovery – HP BIOS provides numerous ways to upgrade HP Business Desktop computers, including BIOS updates from within Windows (HP Firmware Update and Recovery), HP Client Manager, and fail-safe recovery. In addition, the HP BIOS Configuration Utility enables replication of BIOS settings within Windows while the Replicated Setup feature provides the same capability within BIOS (F10) Setup. The BIOS Configuration Utility is available from the HP support website.
- HP BIOS uses PKI signing of the BIOS for trusted BIOS upgrades and recovery.

Additional HP BIOS Features:

- Power-On password – Helps prevent an unauthorized user from powering on the system.
- Administrator password – Also known as the BIOS Setup password, this helps prevent unauthorized changes to the system configuration. If the administrator password is not known, the BIOS cannot be updated and changes cannot be made to BIOS settings using BIOS Setup or under the OS. and changes cannot be made to BIOS settings using BIOS Setup or under the OS.
- S4/S5 Maximum Power Savings setting supports EU Lot6 requirement and allows the computer to power down below 0.5W in S4/S5 (when turned off). When S4/S5 Maximum Power Savings feature is enabled below features are turned off:
 - Power to expansion connectors / slots
 - Wake events other than power buttons (such as wake on LAN)
 - USB charging ports

HP Sure Start Gen4 Start

- BIOS Integrity checking – Sure Start protection ensures that only trusted BIOS code is executed and not rootkits, viruses and malware. Verification is done upon boot up, shutdown and while the system is on.
- Sure Start is set by default to automatically repair the BIOS if corrupted or compromised but is policy driven for better manageability. Start is set by default to automatically repair the BIOS if corrupted or compromised but is policy driven for better manageability. Start is set by default to automatically repair the BIOS if corrupted or compromised but is policy driven for better manageability.

QuickSpecs

HP Z2 Mini G4 Workstation

Supported Components

- Protecting beyond BIOS – Integrity checking and repair is extended to other data that should be protected such as network configuration parameters, platform specific information (i.e. system IDs), secure boot credentials, and other code the system needs to boot. and repair is extended to other data that should be protected such as network configuration parameters, platform specific information (i.e. system IDs), secure boot credentials, and other code the system needs to boot.
- Audit enabled – System Audit via Sure Start Event Logs capture data such as incident, repair date and time for troubleshooting and investigating

HP Sure Start Gen4 is available on HP Workstation products equipped with Intel® 8th generation processors.

Remote Power On

Benefits of the Remote Power:

- Make it easier to power-on HP Z2 Mini G4 Workstation by USB keyboard/mouse in some use scenarios.
- Support wired/wireless, USB low speed/full speed keyboards and mouses.
- Easy setup in BIOS menu.
- Support waking from both S4 (Hibernate) and S4/S5 (Shutdown).

Limitations:

- Waking from S4/S5 is limited to only via keyboard/mouse device.

Instructions:

1. Connect USB keyboard/mouse to USB port.
2. System must recognize USB keyboard/mouse in S0 first. (USB full speed keyboard/mouse, such as wireless keyboard/mouse or Smart card keyboard need to connect to system over 60 seconds in S0 to be recognized on charging port.)
3. Sleep to S4 or S5.
4. Wake system by any key on keyboard or clicking/movement* on mouse.

* If mouse has the capability to wake system by movement

SOFTWARE COMPONENTS AND APPLICATIONS WITH WINDOWS

BIOS

HP BIOSphere Gen4¹⁷

HP DriveLock & Automatic

BIOS Update via Network

Master Boot Record Security

Power On Authentication Authentication

Secure Erase ¹⁸

Absolute Persistence Module¹⁹

Pre-boot Authentication

HP Wireless Wakeup

Software

HP Hotkey Support



Supported Components

HP Performance Advisor
HP Velocity
HP Remote Graphics Software (RGS) 7.x

Manageability Features
HP Driver Packs²²
HP System Software Manager (SSM)
HP BIOS Config Utility (BCU)
HP Client Catalog
HP Manageability Integration Kit Gen2²³

Client Security Software
HP Client Security Suite Gen4²⁵ including:
HP Security Manager²⁶ (including Credential Manager, HP Password Manager, HP Spare Key)
HP Device Access Manager
HP Power On Authentication Authentication
Microsoft Defender²⁷

Security Management
Secure Erase¹⁸
TPM 2.0 Embedded Security Chip shipped with Windows 10 (Common Criteria EAL4+ Certified)³²
SATA port disablement (viaBIOS)
Serial, USB enable/disable (viaBIOS)
Power-on password (viaBIOS)
Setup password (viaBIOS)
HP Sure Click³⁵
HP Sure Start Gen4³⁰
HP Sure Run³³
HP Sure Recover³⁴

17. HP BIOSphere Gen4 requires Intel(R) or AMD 8th Gen processors. Features may vary depending on the platform and configurations.

18. For the methods outlined in the National Institute of Standards and Technology Special Publication 800-88 "Clear" sanitation method. HP Secure Erase does not support platforms with Intel® Optane™.

19. Absolute agent is shipped turned off, and will be activated when customers activate a purchased subscription. Subscriptions can be purchased for terms ranging multiple years. Service is limited, check with Absolute for availability outside the U.S. The Absolute Recovery Guarantee is a limited warranty. Certain conditions apply. For full details visit:

<http://www.absolute.com/company/legal/agreements/computrace-agreement>. Data Delete is an optional service provided by Absolute Software. If utilized, the Recovery Guarantee is null and void. In order to use the Data Delete service, customers must first sign a Pre-Authorization Agreement and either obtain a PIN or purchase one or more RSA SecurID tokens from Absolute Software.-agreement. Data Delete is an optional service provided by Absolute Software. If utilized, the Recovery Guarantee is null and void. In order to use the Data Delete service, customers must first sign a Pre-Authorization Agreement and either obtain a PIN or purchase one or more RSA SecurID tokens from Absolute Software.

22. HP Driver Packs not preinstalled, however available for download at <http://www.hp.com/go/clientmanagement>.

23. HP Manageability Integration Kit can be downloaded from <http://www8.hp.com/us/en/ads/clientmanagement/overview.html>

25. HP Client Security Suite Gen 4 requires Windows and Intel® or AMD 8th generation processors.

26. HP Password Manager requires Internet Explorer or Chrome or FireFox. Some websites and applications may not be supported. User may need to enable or allow the add-on / extension in the internet browser.. Some websites and applications may not be supported. User may need to enable or allow the add-on / extension in the internet browser.

27. Microsoft Defender Opt in and internet connection required for updates. in and internet connection required for updates.

30. HP Sure Start Gen4 is available on HP Workstation products equipped with Intel® 8th generation processors

32. Firmware TPM is version 7.63. Hardware TPM is v2.0. .

33. HP Sure Run is available on HP Workstation products equipped with 8th generation Intel® or AMD® processors.

QuickSpecs

HP Z2 Mini G4 Workstation

Supported Components

34. HP Sure Recover is available on HP Elite PCs with 8th generation Intel® or AMD processors and requires an open, wired network connection. Not available on platforms with multiple internal storage drives, Intel® Optane™. You must back up important files, data, photos, videos, etc. before use to avoid loss of data.

35. HP Sure Click is available on most HP PCs and supports Microsoft® Internet Explorer, Google Chrome, and Chromium™. Supported attachments include Microsoft Office (Word, Excel, PowerPoint) and PDF files in read only mode, when Microsoft Office or Adobe Acrobat are installed.

Solo Network

QuickSpecs

HP Z2 Mini G4 Workstation

System Technical Specifications

System Board

System Board Form Factor Entry: 200mm x 200mm (7.9 x 7.9 inches)
Performance: 200mm x 200mm (7.9 x 7.9 inches)

Processor Socket Single LGA 1151

CPU Bus Speed DMI link between CPU & PCH: Performance comparable to PCIe Gen3 x4

Chipset Intel® PCH C246

Memory Expansion Slots 2 SODIMM DDR4 memory slots

Memory Type Supported DDR4, UDIMM (Unbuffered), ECC & non-ECC

Memory Modes Non-Interleaved for single channel. Interleaved when both channels are populated.

Memory Speed Supported 2666MHz DDR4 for Coffeelake processors;

Memory Protection ECC available on data

*Requires ECC DIMMs to be installed, as well as a CPU that supports ECC

Maximum Memory 64GB

Memory Configuration (Supported) 4GB, 8GB, 16GB and 32GB non-ECC/ 8GB, 16GB and 32GB ECC unbuffered DIMMs are supported. ECC and non-ECC memory DIMMs cannot be mixed on the same system.

Notes [Maximum memory capacities assume 64-bit operating systems, such as Windows® 10 Professional 64-Bit or Red Hat Linux 64-bit.](#)

Supported Drive Interfaces **SATA** Integrated (1) Serial ATA interfaces (6Gb/s SATA).

Integrated Graphics Intel® UHD Graphics 610 (on Pentium™ Gold-5xxx processors);
Intel® UHD Graphics 630 (on Core™ i3/i5/i7-8xxx processors);
Intel® UHD Graphics P630 for Xeon® E processors based on Unified Memory Architecture (UMA).

A region of system memory is reserved and dedicated to the graphics display.

Support for Microsoft DirectX 12.1, OpenGL 4.4 and OpenCL 2.0 on Intel® UHD Graphics P630.

Entry: (2) DP 1.2 graphics ports integrated on motherboard; (1) DP 1.2 graphic capable through use of Flexible DP module. Supports up to three simultaneous displays across DP outputs.
Max. resolution supported: 4096x2160 @60Hz

Performance: (1) DP 1.2 graphics ports integrated on motherboard switchable between intel® graphic and discrete graphic; (1) DP 1.2 graphic capable through use of Flexible DP module switchable between intel®

QuickSpecs

HP Z2 Mini G4 Workstation

System Technical Specifications

graphic and discrete graphic. Supports up to three simultaneous displays from Intel® graphic across DP outputs. (2) DP 1.2 graphic port dedicated for display from discrete graphics
Max. resolution supported: 4096x2160 @60Hz

Power Supply	Graphics options
135W	Integrated Graphics
200W	Nvidia P600
230W	Nvidia P1000, AMD WX4150, WX3200
230W with 95 CPU	Integrated Graphics, Nvidia P600

	Network Controller	Integrated Ethernet PHY Connection I219LM. Management capabilities: WOL, PXE 2.1 and AMT 12.0
	Serial	1 rear port (configurable option)
IEEE 1394 Connector(s)		
USB Connector(s)	Front	Side I/O: 2 USB 3.0 Type-A 1 USB 3.1 G2 Type-C™
	Rear	2 USB 3.0 Type-A 1 USB 3.1 G2 Type-C™ (Z2 Mini G4 Performance only)
HD Integrated Audio		Yes; supports CTIA headset
Flash ROM		Yes
Chassis Fan Header		Yes
Front Control Panel/Speaker Header		Additional CPU/GFX Cooler (Z2 Mini G4 Performance only)
CMOS Battery Holder - Lithium		Side I/O: Yes
Integrated Trusted Platform Module		Yes
Power Supply Headers		Integrated TPM 2.0
		Yes, single DC-in jack for external power supplies
Power Switch, Power LED & Hard Drive LED Header		1. The power and failure LED are combined in the front power switch. 2. The HDD LED & DC-in LED are combined within one port on the Rear I/O. The LED will be lit once the AC power is plugged in. As soon as the system is booted up, the LED will function as a standard HDD activity LED.
Clear Password Jumper		Yes
Keyboard/Mouse		USB
Power Supply		Z2 Mini G4 Entry: 135W, 89% efficiency, wide-ranging, active PFC Power Supply Z2 Mini G4 Performance: 200W, 89% efficiency, wide-ranging, active PFC Power Supply Z2 Mini G4 Performance: 230W, 89% efficiency, wide-ranging, active PFC Power Supply
		The Z2 Mini G4 PSU Efficiency Report can be found at this link: TBD
Operating Voltage Range		90–265 VAC
Rated Voltage Range		100–240 VAC

QuickSpecs

HP Z2 Mini G4 Workstation

System Technical Specifications

Rated Line Frequency	50-60 Hz
Operating Line Frequency Range	47-63 Hz
Rated Input Current	Z2 Mini G4 Entry: 1.9A @ 90Vac Z2 Mini G4 Performance: 2.9A @ 90Vac (200W EPS) Z2 Mini G4 Performance: 3.5A @ 90Vac (230W EPS)
Heat Dissipation	Typical: TBD btu/hr (TBD kcal/hr) Maximum: TBD btu/hr (TBD kcal/hr)
ENERGY STAR® certified (Config Dependent)	Yes
FEMP Standby Power Compliant	Yes, with Wake-on-LAN disabled: <1W in S4/S5- Power Off
Surge Tolerant Full Ranging Power Supply (withstands power surges up to 2000V)	Yes

System Configurations

Z2 Mini G4 Configuration #1 (TBD)	Processor Info	1x Intel® Core® i3-8100 3.6 6MB 4C
	Memory Info	8GB (1x8GB) DDR4-2666 ECC SO-DIMM
ENERGY STAR CERTIFIED	Graphics Info	Intel® UHD Integrated Graphics 630
	Disks/Optical/Floppy	1x 1TB 7200 RPM SATA HDD / 1x Z Turbo Drive G2 512GB PCIe 1st SSD
	Power Supply	135W EPS
	Other	Ethernet Capable

Energy Consumption (Watts)

	115 VAC		230 VAC		100 VAC	
	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
Windows long Idle (S0)	9.765		9.900		9.642	
Windows short Idle (S0)	10.042		10.241		10.146	
Windows Busy Typ(S0)	73.371		74.665		74.087	
Windows Busy Max (S0)	94.000		95.034		94.412	
Sleep (S3)	1.069	0.860	1.154	0.931	1.118	1.046
Off (S5)	0.858	0.748	0.928	0.815	0.856	0.755
Zero Power Mode (ErP)	0.364		0.423		0.366	

Heat Dissipation (Btu/hr)

	115 VAC		230 VAC		100 VAC	
	LAN Enabled	LAN Disabled	LAN Enabled	LAN Enabled	LAN Disabled	LAN Enabled
Windows long Idle (S0)	33.318		6.488		32.899	
Windows short Idle (S0)	34.263		34.942		34.618	
Windows Busy Typ(S0)	250.342		254.757		252.785	
Windows Busy Max (S0)	320.728		324.256		322.133	
Sleep (S3)	3.647	2.934	3.937	3.177	3.815	3.569
Off (S5)	2.927	2.552	3.166	2.781	2.921	2.576
Zero Power Mode (ErP)	1.242		1.443		1.249	



QuickSpecs

HP Z2 Mini G4 Workstation

System Technical Specifications

<i>Z2 Mini G4 Configuration #2 (TBD)</i>	Processor Info	1x Intel® Core® i7-8700 3.2 12MB 6C
	Memory Info	HP 16GB (2x8GB) DDR4-2666 non-ECC SO-DIMM
	Graphics Info	NVIDIA Quadro P600 4GB next MXM
	Disks/Optical/Floppy	1x 1TB Z Turbo Drive G2 M.2 SSD
	Power Supply	200W EPS
	Other	Ethernet Capable

Energy Consumption (Watts)	115 VAC		230 VAC		100 VAC	
	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
Windows long Idle (S0)	15.577		15.580		15.528	
Windows short Idle (S0)	17.197		17.306		17.557	
Windows Busy Typ(S0)	171.57		156.86		161.7	
Windows Busy Max (S0)	196.85		192.95		204.03	
Sleep (S3)	1.169	1.05	1.206	1.111	1.174	1.111
Off (S5)	1.024	0.859	1.056	0.923	0.946	0.865
Zero Power Mode (ErP)	0.449		0.489		0.411	

Heat Dissipation (Btu/hr)	115 VAC		230 VAC		100 VAC	
	LAN Enabled	LAN Disabled	LAN Enabled	LAN Enabled	LAN Disabled	LAN Enabled
Windows long Idle (S0)	53.149		53.159		52.981	
Windows short Idle (S0)	58.676		59.048		59.904	
Windows Busy Typ(S0)	585.397		535.206		551.720	
Windows Busy Max (S0)	671.652		658.345		696.150	
Sleep (S3)	3.987	3.583	4.115	3.791	4.006	3.791
Off (S5)	3.494	2.931	3.603	3.149	3.228	2.951
Zero Power Mode (ErP)	1.532		1.668		1.402	

<i>Z2 Mini G4 Configuration #3 (TBD)</i> ENERGY STAR CERTIFIED	Processor Info	1x Intel® Xeon™ E-2176G 3.7 12M 6C
	Memory Info	32GB (2x16GB) DDR4-2666 ECC SO-DIMM
	Graphics Info	AMD Radeon Pro WX 4150 4GB MXM
	Disks/Optical/Floppy	1x 500 GB 7200 RPM SATA HDD
	Power Supply	230W EPS
	Other	Ethernet Capable

Energy Consumption (Watts)	115 VAC		230 VAC		100 VAC	
	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
Windows long Idle (S0)	21.060		21.158		19.434	
Windows short Idle (S0)	21.114		21.427		20.238	
Windows Busy Typ(S0)	184.74		184.26		200.1	
Windows Busy Max (S0)	210.48		201.97		208.93	
Sleep (S3)	1.184	1.096	1.181	1.105	1.204	1.119
Off (S5)	0.841	0.718	0.845	0.724	0.857	0.729
Zero Power Mode (ErP)	0.435		0.441		0.436	

Heat Dissipation (Btu/hr)	115 VAC		230 VAC		100 VAC	
	LAN Enabled	LAN Disabled	LAN Enabled	LAN Enabled	LAN Disabled	LAN Enabled
Windows long Idle (S0)	71.857		72.191		66.309	
Windows short Idle (S0)	72.041		73.109		69.052	
Windows Busy Typ(S0)	630.333		628.695		682.741	



QuickSpecs

HP Z2 Mini G4 Workstation

System Technical Specifications

Windows Busy Max (S0)	718.158		689.122		712.869	
Sleep (S3)	4.040	3.740	4.030	3.770	4.108	3.818
Off (S5)	2.869	2.450	2.883	2.470	2.924	2.487
Zero Power Mode (ErP)	1.484		1.505		1.488	

Declared Noise Emissions Z2 Mini G4 (Entry)

Declared Noise Emissions (Entry-level and High-end configurations)

System Configuration (Entry level With HDD)	Processor Info	Intel® Core™ i3-8100 4C
	Memory Info	1 - 8GB DDR4-2666 SO-DIMM Memory
	Graphics Info	Intel UHD Graphics
	Disks/SSD	1 - Hitachi 500GB SATA 7200RPM HDD 1 - Samsung 256GB PCIe M.2 SSD

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)

	Sound Power (LWAd, bels)	Deskside Sound Pressure (LpAm, decibels)
Idle	TBD	TBD
Hard drive Operating (random reads)	TBD	TBD

System Configuration (Entry level Only SSD)

Processor Info	Intel® Core™ i3-8100 4C
Memory Info	1 - 8GB DDR4-2666 SO-DIMM Memory
Graphics Info	Intel UHD Graphics
Disks/SSD	N / A 1 - Samsung 256GB PCIe M.2 SSD

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)

	Sound Power (LWAd, bels)	Deskside Sound Pressure (LpAm, decibels)
Idle	TBD	TBD
Hard drive Operating (random reads)	TBD	TBD

System Configuration (High-end)

Processor Info	Intel® Core™ i7-8700 6C
Memory Info	2 - 8GB DDR4-2666 SO-DIMM Memory
Graphics Info	Intel UHD Graphics
Disks/SSD	1 - Hitachi 1TB SATA 7200RPM HDD 1 - Samsung 512GB PCIe M.2 SSD

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)

	Sound Power (LWAd, bels)	Deskside Sound Pressure (LpAm, decibels)
Idle	3.14	19.2
Hard drive Operating (random reads)	3.18	19.4

Declared Noise Emissions Z2 Mini G4 Performance

Declared Noise Emissions (Entry-level and High-end configurations)

System Configuration (Entry level With HDD)	Processor Info	Intel® Core™ i3-8100 SR2HG/3.6G/6M/4c
	Memory Info	1 - 4GB DDR4-2666 SO-DIMM Memory

QuickSpecs

HP Z2 Mini G4 Workstation

System Technical Specifications

	Graphics Info	NVIDIA® Quadro® P600	
	Disks/SSD	1 - Hitachi 500GB SATA 7200RPM HDD 1 - Samsung 256GB PCIe M.2 SSD	
Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)		Sound Power (LWAd, bels)	Deskside Sound Pressure (LpAm, decibels)
	Idle	3.16	20.3
	Hard drive Operating (random reads)	3.17	20.4
System Configuration (Entry level Only SSD)	Processor Info	Intel® Core™ i3-8100 SR2HG/3.6G/6M/4c	
	Memory Info	1 - 4GB DDR4-2666 SO-DIMM Memory	
	Graphics Info	NVIDIA® Quadro® P600	
	Disks/SSD	N / A 1 - Samsung 256GB PCIe M.2 SSD	
Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)		Sound Power (LWAd, bels)	Deskside Sound Pressure (LpAm, decibels)
	Idle	3.06	19.1
	Hard drive Operating (random reads)	/	/
System Configuration (High-end)	Processor Info	Intel® Xeon® E-2144 QJ70/3.6G/8M/4c	
	Memory Info	2 - 8GB DDR4-2666 SO-DIMM Memory	
	Graphics Info	NVIDIA® Quadro® P600	
	Disks/SSD	1 - Hitachi 1TB SATA 7200RPM HDD 1 - Samsung 512GB PCIe M.2 SSD	
Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)		Sound Power (LWAd, bels)	Deskside Sound Pressure (LpAm, decibels)
	Idle	3.21	22.2
	Hard drive Operating (random reads)	3.23	22.7

QuickSpecs

HP Z2 Mini G4 Workstation

System Technical Specifications

Environmental Requirements	Temperature	Operating: 5° to 35° C (40° to 95° F) Above 1524 m (5,000 feet) altitude, the maximum operating temperature is reduced by 1° C (1.8° F) for every 305 m (1,000 feet) increase in elevation Non-operating: -40° to 60° C (-40° to 140° F) Maximum rate of change: 10°C/hr
	Humidity	Operating: 10% to 85% RH, non-condensing, 35° C maximum wet bulb Non-operating: 10% to 90% RH, non-condensing, 35° C maximum wet bulb
	Maximum Altitude	Operating (with Rotational Hard Drives): 3,048 m (10,000 feet) Operating (with only Solid-State Drives): 5,000 m (16,404 feet) Non-operating: 12,192 m (40,000 feet) Maximum operating temperature is reduced as altitude increases. See Temperature for details.
	Shock (non-repetitive)	Operating ½-sine: 40g, 2-3ms (~62 cm/sec) Non-operating ½-sine: 160 cm/s, 2-3 ms (~105 g) Non-operating square: 422 cm/s, 20 g
	Vibration	Operating random: 0.5 g (rms), 5-300 Hz, up to 0.0025 g ² /Hz Non-operating random: 2.0 g (rms), 5-500 Hz, up to 0.0150 g ² /Hz

QuickSpecs

HP Z2 Mini G4 Workstation

System Technical Specifications

Physical Security and Serviceability

Access Panel	Tool-less Includes system board and memory information
Hard Drives	HDD cage requires the use of a screwdriver to remove the HDD
Expansion Cards	M.2 module requires a screwdriver to service and replace. An option card requires a screwdriver to service and replace.
Processor Socket	Tool-less, except for the processor heatsink.
Color-coordinated Cables and Connectors	Yes
Memory	Tool-less
System Board	Screw-In
Dual Color Power and HD LED on Front of Computer	The Power LED is on the front of the system, but the HDD LED is located on the Rear of the system
Configuration Record SW	Yes
Over-Temp Warning on Screen	Yes
Restore CD/DVD Set	Consists of an operating system DVD (OSDVD) and a driver DVD (DRDVD). OSDVD restores the original operating system. DRDVD will provide all drivers for the system. The DRDVD may also contain applications that originally shipped with the system for optional installation. Applications can also be obtained from HP.com. OSDVD and DRDVD are orderable with the system and available from HP Support.
Dual Function Front Power Switch	Yes, causes a fail-safe power off when held for 4 seconds (default) or 15 seconds (can be configured by F10 BIOS setup\Advanced\System Options\Power button override)
Cable Lock Support	Yes, Kensington Cable Lock (optional): Locks top cover from being opened and secures chassis to furniture to prevent theft 3 mm x 7 mm slot at rear of system
Serial, Parallel, USB, Audio, Network, Enable/Disable Port Control	Yes, enables or disables serial, USB, audio, and network ports (parallel port is not supported on the Z2 Mini G4 G4)
Removable Media Write/Boot Control	Yes, prevents ability to boot from removable media on supported devices (and can disable writes to media)
Power-On Password	Yes, prevents an unauthorized person from booting up the workstation

QuickSpecs

HP Z2 Mini G4 Workstation

System Technical Specifications

Setup Password	Yes, prevents an unauthorized person from changing the workstation configuration
NIC LEDs (integrated) (Green & Amber)	Yes
CPUs and Heatsinks	A T-15 Torx or flat blade screwdriver is needed to remove the CPU heatsink before the CPU can be removed. CPU removal is tool-less
Power Supply Diagnostic LED	Yes; this is located on the Rear of the chassis and combined with the HDD LED. When the PSU adapter is plugged in, and the unit is powered off, the Power OK LED will glow.
Front Power LED	Yes, white (normal), red (fault)
Internal Speaker	Yes, on the side of the chassis
System/Emergency ROM Flash Recovery	Recovers corrupted system BIOS.
Cooling Solution	Air cooled forced convection
CPU Heatsink Fan	Z2 Mini G4 Entry & Performance CPU blower solution: 11.1 mm x 65mm x 82.1mm Z2 Mini G4 Performance GPU blower solution: 29mm x 103.6mm x 102.2mm
Chassis Fan	Z2 Mini G4 Entry: Single system blower Z2 Mini G4 Performance: Dual system blower
Memory Heatsink Fan	No
HP PC Hardware Diagnostics UEFI	HP PC Hardware Diagnostics (UEFI) enables hardware level testing outside the operating system on many components. The diagnostics can be invoked by pressing F2 at POST, and is available as a download from HP Support.
Access Panel Key Lock	The Kensington lock slot on the chassis serves this purpose
ACPI-Ready Hardware	Advanced Configuration and Power Management Interface (ACPI). <ul style="list-style-type: none"> • Allows the system to wake from a low power mode. • Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system
Trusted Platform Module Chip	Yes
M.2 Card Retention	Yes, all M.2 modules are retained by a single screw M.2 storage card requires heatsink, which has another screw.
Flash ROM	Yes
Diagnostic Power Switch LED on board	Yes
Clear Password Jumper	Yes

QuickSpecs

HP Z2 Mini G4 Workstation

System Technical Specifications

Clear CMOS Jumper	Yes
CMOS Battery Holder	Yes: Z2 Mini G4 Entry Yes: Z2 Mini G4 Performance
DIMM Connectors	Yes

Solo Network

System Technical Specifications

Social and Environmental Responsibility

Eco-Label Certifications & Declarations This product is low halogen except for power cords, cables and peripherals. Service parts obtained after purchase may not be Low Halogen.

- ENERGY STAR® (energy-saving features available on selected configurations –Windows® only)
- US Federal Energy Management Program (FEMP)
- China Energy Conservation Program (CECP)
- IT ECO declaration

Batteries

The battery in this product complies with EU Directive 2006/66/EC
 Battery size: CR2032 (coin cell)
 Battery type: Lithium Metal

The battery in this product does not contain:

- Mercury greater than 5ppm by weight
- Cadmium greater than 10ppm by weight
- Lead greater than 40ppm by weight

Restricted Material Usage

This product meets the material restrictions specified in HP's General Specification for the Environment. <http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf>
 HP Inc. is committed to compliance with all applicable environmental laws and regulations, including the European Union Restriction of Hazardous Substances (RoHS) Directive. HP's goal is to exceed compliance obligations by meeting the requirements of the RoHS Directive on a worldwide basis.

End-of-Life Management and Recycling

HP Inc. offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner. This product is greater than 90% recyclable by weight when properly disposed of at end of life.

HP Inc. Corporate Environmental Information

For more information about HP's commitment to the environment:
 Living Progress Report <http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Eco-label certifications
<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>

ISO 14001 certificates:
<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html>

Additional Information

- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.
- Plastic parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.
- This product is >90% recycle-able when properly disposed of at end of life
- EPEAT®2019 Gold registered in the United States*

*Based on US EPEAT® registration according to IEEE 1680.1-2018 EPEAT®. EPEAT® status varies by country. Visit www.epeat.net for more information.

Packaging

HP Workstation product packaging meets the HP General Specification for the Environment at http://www.hp.com/hpinfo/globalcitizenship/society/gen_specifications.html

QuickSpecs

HP Z2 Mini G4 Workstation

System Technical Specifications

- Does not contain restricted substances listed in HP Standard 011-1 General Specification for the Environment
- Does not contain ozone-depleting substances (ODS)
- Does not contain heavy metals (lead, mercury, cadmium or hexavalent chromium) in excess of 100 ppm sum total for all heavy metals listed
- Maximizes the use of post-consumer recycled content materials in packaging materials
- All packaging material is recyclable
- All packaging material is designed for ease of disassembly
- Reduced size and weight of packages to improve transportation fuel efficiency
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards formatting

Packaging Materials

Internal

Cushions made from fabricated recycled expanded-polyethylene (EPE) or recycled expanded-polypropylene (EPP). May also be made from recycled molded paper-pulp (MPP).

External

Carton made from corrugated fiberboard with at least 35% recycled content.

QuickSpecs

HP Z2 Mini G4 Workstation

System Technical Specifications

Manageability

Intel® Active Management Technology (AMT) v12 An advanced set of remote management features and functionality which provides network administrators the latest and most effective tools to remotely discover, heal, and protect networked client systems regardless of the system's health or power state. AMT 12 includes the following advanced management functions:

- Support for configuration of Intel AMT 12.0 new capabilities
- No reset after provisioning
- Support for Microsoft Windows Server 2012 R2
- Support for New Microsoft SQL Server Versions including Standard and Enterprise editions
- Support for Intel SSD Prop 2500 Series
- Support for Intel Enterprise Digital Fence
- The Platform Discovery Utility can now discover these additional Intel products:
 - Intel SSD Pro 2500 Series; Enterprise Digital Fence
- Intel Identity Protection Technology with One Time Password; Public Key Infrastructure; Multi Factor Authentication
- Intel Identity Protection Technology with Intel WiGig
- New Profile Editor and Profile Editor Plugin Interface
- New Required Permissions for Solutions Framework

HP Image Assistant

Visit: <http://ftp.hp.com/pub/caps-softpaq/cmit/HPIA.html>

System Software Manager Visit: <http://www.hp.com/go/ssm>

Service, Support, and Warranty

- Program to proactively communicate Product Change Notifications (PCNs) and Customer Advisories by email to customers, based on a user-defined profile.
- PCNs provide advance notification of hardware and software changes to be implemented in the factory providing time to plan for transition.
- Customer Advisories provide concise, effective problem resolution, greatly reducing the need to call technical support.

QuickSpecs

HP Z2 Mini G4 Workstation

Stable & Consistent Offerings

As part of its commitment to hardware, software, and solution innovation, HP is proud to introduce this breakthrough platform configuration stability to HP Workstation customers. HP Stable & Consistent Offerings are built on the foundation of a carefully chosen set of hardware and software designed and tested to work with all HP Z Workstation platforms through their end of life. These components and their corresponding HP Workstation platform compatibility are outlined in this section.

HP Stable & Consistent Offerings are available worldwide to all HP Workstation customers-no special programs, no additional cost, no kidding. Simply select your hardware and software components when you customize your HP Workstation and be assured that you'll be able to buy that same configuration throughout the lifecycle of the product.

Processors	Product #	Offering
		Intel® Xeon E-2124 3.4 8M GT2 4C
		Intel® Xeon E-2144 3.6 8M GT2 4C

Hard Drives	Product #	Offering
		HDD 1TB 7200RPM SATA 2.5
		SSD 512GB TLC M.2

Graphics	Product #	Offering
		NVIDIA® Quadro® P600 4GB Graphics

Technical Specifications - Processors

Intel® Xeon® processor E-2100 family

Intel® Xeon® processor E-2286G
Intel® Xeon® processor E-2278G
Intel® Xeon® processor E-2276G
Intel® Xeon® processor E-2274G
Intel® Xeon® processor E-2244G
Intel® Xeon® processor E-2236
Intel® Xeon® processor E-2226G
Intel® Xeon® processor E-2224G
Intel® Xeon® processor E-2176G
Intel® Xeon® processor E-2174G
Intel® Xeon® processor E-2144G
Intel® Xeon® processor E-2136
Intel® Xeon® processor E-2124G
Intel® Xeon® processor E-2104G

9th generation Intel® Core™ processor family

Intel® Core™ i9-9900K 3.6 2666 8C CPU
Intel® Core™ i9-9900 3.1 2666 8C CPU
Intel® Core™ i7-9700K 3.6 2666 8C CPU
Intel® Core™ i7-9700 3.0 2666 8C CPU
Intel® Core™ i5-9600 3.1 2666 6C CPU
Intel® Core™ i5-9500 3.0 2666 6C CPU
Intel® Core™ i3-9100 3.6 2666 4C CPU

8th generation Intel® Core™ processor family

Intel® Core™ i7-8700 3.2 2666 6C CPU
Intel® Core™ i5-8500 3.0 2666 6C CPU

8th generation Intel® Core™ i3/Pentium processor family

Intel® Core™ i3-8100 3.6 2400 4C CPU
Intel® Pentium® G5400 3.7 2400 2C CPU

QuickSpecs

HP Z2 Mini G4 Workstation

Technical Specifications - Hard Drives

SATA Hard Drives for HP Workstations

500GB SATA 7200 rpm 6Gb/s 3.5" HDD

Capacity	500GB
Protocol	SATA
Form Factor	SFF (2.5")
Controller	AHCI
Rated for 24/7/365 operation	NO
Physical Size (Height)	0.28 in; .7 cm
Physical Size (Width)	2.75 in; 6.99 cm
Media Diameter	2.5 in; 6.36 cm
Interface	Serial ATA (6Gb/s), NCQ enabled
Synchronous Transfer Rate (Maximum)	Up to 600MB/s*
Operating Temperature	32° to 140° F (0° to 60° C)

*Actual performance may vary.

1TB SATA 7200 rpm 6Gb/s SFF HDD

Capacity	1TB
Protocol	SATA
Form Factor	SFF (2.5")
Controller	AHCI
Rated for 24/7/365 operation	NO
Physical Size (Height)	0.28 in; .7 cm
Physical Size (Width)	2.75 in; 6.99 cm
Media Diameter	2.5 in; 6.36 cm
Interface	Serial ATA (6Gb/s), NCQ enabled
Synchronous Transfer Rate (Maximum)	Up to 600MB/s*
Operating Temperature	32° to 140° F (0° to 60° C)

*Actual performance may vary.

Performance PCIe SSDs for HP Workstations

HP Z Turbo Drive 256GB M.2 2280 TLC SSD

Capacity	256GB
Protocol	PCIe
Form Factor	M.2
Controller	NVMe
NAND Type	3D TLC
SED Support	Opal 2
Endurance	200TB
Reliability (MTBF)	1.5M hours
Interface	PCI Express 3.0 x4 electrical x4 physical
Operating Temperature	32° to 158° F (0° to 70° C)
Performance	Sequential Read 3500 MB/s *
	Sequential Write 2200 MB/s *
	Random Read 240K IOPS *
	Random Write 480K IOPS *

*Actual performance may vary.

QuickSpecs

HP Z2 Mini G4 Workstation

Technical Specifications - Hard Drives

HP ZTurbo Drive 512GB M.2 2280 TLC SSD	Capacity	512GB	
	Protocol	PCIe	
	Form Factor	M.2	
	Controller	NVMe	
	NAND Type	3D TLC	
	SED Support	Opal 2	
	Endurance	300TB	
	Reliability (MTBF)	1.5M hours	
	Interface	PCI Express 3.0 x4 electrical x4 physical	
	Operating Temperature	32° to 158° F (0° to 70° C)	
	Performance	Sequential Read	3500 MB/s*
		Sequential Write	2900 MB/s*
		Random Read	460 K IOPS*
Random Write		500K IOPS*	

*Actual performance may vary.

HP ZTurbo Drive 1TB M.2 2280 TLC SSD	Capacity	1TB	
	Protocol	PCIe	
	Form Factor	M.2	
	Controller	NVMe	
	NAND Type	3D TLC	
	SED Support	Opal 2	
	Endurance	400TB	
	Reliability (MTBF)	1.5M hours	
	Interface	PCI Express 3.0 x4 electrical x4 physical	
	Operating Temperature	32° to 158° F (0° to 70° C)	
	Performance	Sequential Read	3500 MB/s*
		Sequential Write	3000 MB/s*
		Random Read	580K IOPS*
Random Write		500K IOPS*	

*Actual performance may vary.

HP ZTurbo Drive 2TB M.2 2280 TLC SSD	Capacity	2TB	
	Protocol	PCIe	
	Form Factor	M.2	
	Controller	NVMe	
	NAND Type	3D TLC	
	SED Support	Opal 2	
	Endurance	500TB	
	Reliability (MTTF)	1.5M hours	
	Interface	PCI Express 3.0 x4 electrical x4 physical	
	Operating Temperature	32° to 158° F (0° to 70° C)	
	Performance	Sequential Read	3300 MB/s*

QuickSpecs

HP Z2 Mini G4 Workstation

Technical Specifications - Hard Drives

Sequential Write	2400 MB/s*
Random Read	500K IOPS*
Random Write	440K IOPS*

*Actual performance may vary.

Mainstream PCIe SSDs for HP Workstations

HP 256GB M.2 2280 TLC SSD

Capacity	256GB
Protocol	PCIe
Form Factor	M.2
Controller	NVMe
NAND Type	3D TLC
Endurance	200TB
Reliability (MTBF)	1.5M hours
Interface	PCI Express 3.0 x4 electrical x4 physical
Operating Temperature	32° to 158° F (0° to 70° C)
Performance	Sequential Read 3100 MB/s *
	Sequential Write 1400 MB/s *
	Random Read 200 K IOPS *
	Random Write 320 K IOPS *

*Actual performance may vary.

HP 512GB M.2 2280 TLC SSD

Capacity	512GB
Protocol	PCIe
Form Factor	M.2
Controller	NVMe
NAND Type	3D TLC
Endurance	300TB
Reliability (MTBF)	1.5M hours
Interface	PCI Express 3.0 x4 electrical x4 physical
Operating Temperature	32° to 158° F (0° to 70° C)
Performance	Sequential Read 3300 MB/s*
	Sequential Write 2500 MB/s*
	Random Read 225 K IOPS*
	Random Write 430 K IOPS*

*Actual performance may vary.

HP 1TB M.2 2280 TLC SSD

Capacity	1TB
Protocol	PCIe
Form Factor	M.2
Controller	NVMe
NAND Type	3D TLC
Endurance	400TB
Reliability (MTBF)	1.5M hours
Interface	PCI Express 3.0 x4 electrical x4 physical
Operating Temperature	32° to 158° F (0° to 70° C)
Performance	Sequential Read 3300 MB/s*

QuickSpecs

HP Z2 Mini G4 Workstation

Technical Specifications - Hard Drives

Sequential Write	2500 MB/s*
Random Read	400 K IOPS*
Random Write	440 K IOPS*

*Actual performance may vary.

HP 2TB M.2 2280 TLC SSD	Capacity	2TB	
	Protocol	PCIe	
	Form Factor	M.2	
	Controller	NVMe	
	NAND Type	3D TLC	
	Endurance	500TB	
	Reliability (MTBF)	1.5M hours	
	Interface	PCI Express 3.0 x4 electrical x4 physical	
	Operating Temperature	32° to 158° F (0° to 70° C)	
	Performance	Sequential Read	3300 MB/s*
		Sequential Write	2700 MB/s*
		Random Read	430 K IOPS*
		Random Write	500 K IOPS*

*Actual performance may vary.

QuickSpecs

HP Z2 Mini G4 Workstation

Technical Specifications - Graphics

Integrated Intel® UHD Graphics (Z2G4)	Form Factor	Integrated in select Intel® Xeon® E, Intel® Core™ i7, Intel® Core™ i5, and Intel® Core™ i3 processors. Check specific platform specifications for selections.
	Graphics Controller	Intel® UHD Graphics
	Memory	Unified Memory Architecture (UMA) frame buffer. Graphics memory is shared with system memory. Size selectable between 32 MB to 1024 MB via BIOS setting. Default size is 128 MB. Additional memory is allocated for graphics as needed using Intel's Dynamic Video Memory Technology (Intel® DVMT), to provide an optimal balance between graphics and system memory use.
	Connectors	Check system platform specifications where Intel® HD Graphics are available.
	Maximum Resolution	DisplayPort™ 1.2: - up to 4096x2160 x 24 bpp @ 60Hz - supports High Bit Rate 2 (HBR2) and Multi-Stream Transport (MST) HDMI 2.0 output: - up to 4096x2160 x 24 bpp @ 60Hz Dual Link DVI(I) output: - up to 2560 x 1600 x 32 bpp @ 60Hz Single Link-DVI(I) output: - up to 1920 x 1200 x 32 bpp @ 60Hz VGA output: - 2048 x 1536 x 32 bpp @ 85 Hz Note: For HDMI, DVI, and VGA outputs, separate adapters required.
	Shading Architecture	Shader Model 5.0
	Supported Graphics APIs	OpenGL 4.4 DirectX 12
	Available Graphics Drivers	Windows 10

*Integrated graphics will depend on processor. HD content required to view HD images

QuickSpecs

HP Z2 Mini G4 Workstation

Technical Specifications - Graphics

NVIDIA® Quadro® P1000 4GB Graphics	Maximum Resolution	DisplayPort™ 1.2: - up to 4096x2160 x 30 bpp @ 60Hz - supports High Bit Rate 2 (HBR2) and Multi-Stream Transport (MST) HDMI 2.0 output*: - up to 4096x2160 x 30 bpp @ 60Hz
	Image Quality Features	Stereoscopic 3D display support including NVIDIA® 3D Vision™ technology, 3D DLP, Interleaved, and passive stereo
	Display Output	Maximum number of displays: - 4 direct attached monitors Maximum number of DisplayPort™ displays possible per DisplayPort™ output (Multiple displays daisy-chained from one DisplayPort™ 1.2 port requires DisplayPort™ 1.2 MST capable displays or DisplayPort™ 1.2 MST capable hub): - 4 1920x1200 @ 60 Hz - 2 2560x1600 @ 60 Hz - 1 4096x2160 @ 60 Hz Maximum number of monitors across all available NVIDIA® Quadro® outputs is 4.
	Supported Graphics APIs	OpenGL 4.5 DirectX 12 API support includes: CUDA C, CUDA C++, DirectCompute 5.0, OpenCL, Java, Python, and Fortran
	Available Graphics Drivers	Microsoft Windows 10 Linux® HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html
		<p>*HDMI Flex IO Module does not support discrete graphics and will automatically switch over to Intel® UHD graphics on the Flex IO Module port when inserted into the system. Discrete graphics can be used over HDMI from one of the DP ports with an external DP-to-HDMI dongle.</p>

NVIDIA® Quadro® P600 4GB Graphics	Maximum Resolution	DisplayPort™ 1.2: - up to 4096x2160 x 30 bpp @ 60Hz - supports High Bit Rate 2 (HBR2) and Multi-Stream Transport (MST) HDMI 2.0 output*: - up to 4096x2160 x 30 bpp @ 60Hz
	Image Quality Features	Stereoscopic 3D display support including NVIDIA® 3D Vision™ technology, 3D DLP, Interleaved, and passive stereo

QuickSpecs

HP Z2 Mini G4 Workstation

Technical Specifications - Graphics

Display Output	<p>Maximum number of displays: - 4 direct attached monitors</p> <p>Maximum number of DisplayPort™ displays possible per DisplayPort™ output (Multiple displays daisy-chained from one DisplayPort™ 1.2 port requires DisplayPort™ 1.2 MST capable displays or DisplayPort™ 1.2 MST capable hub):</p> <ul style="list-style-type: none">- 4 1920x1200 @ 60 Hz- 2 2560x1600 @ 60 Hz- 1 4096x2160 @ 60 Hz <p>Maximum number of monitors across all available NVIDIA® Quadro® outputs is 4.</p>
Supported Graphics APIs	<p>OpenGL 4.5 DirectX 12</p> <p>API support includes: CUDA C, CUDA C++, DirectCompute 5.0, OpenCL, Java, Python, and Fortran</p>
Available Graphics Drivers	<p>Microsoft Windows 10 Linux®</p> <p>HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html</p>

*HDMI Flex IO Module does not support discrete graphics and will automatically switch over to Intel® UHD graphics on the Flex IO Module port when inserted into the system. Discrete graphics can be used over HDMI from one of the DP ports with an external DP-to-HDMI dongle.

AMD Radeon™ Pro WX 3200 4GB Graphics

Maximum Resolution	<p>DisplayPort™ 1.2: - up to 4096x2160 x 30 bpp @ 60Hz - supports High Bit Rate 2 (HBR2) and Multi-Stream Transport (MST)</p> <p>HDMI 2.0 output*: - up to 4096x2160 x 30 bpp @ 60Hz</p>
Image Quality Features	<p>Stereoscopic 3D display support including NVIDIA® 3D Vision™ technology, 3D DLP, Interleaved, and passive stereo</p>
Display Output	<p>Maximum number of displays: - 5 direct attached monitors</p> <p>Maximum number of DisplayPort™ displays possible per DisplayPort™ output (Multiple displays daisy-chained from one DisplayPort™ 1.2 port requires DisplayPort™ 1.2 MST capable displays or DisplayPort™ 1.2 MST capable hub):</p> <ul style="list-style-type: none">- 4 1920x1200 @ 60 Hz- 2 2560x1600 @ 60 Hz- 1 4096x2160 @ 60 Hz

QuickSpecs

HP Z2 Mini G4 Workstation

Technical Specifications - Graphics

Maximum number of monitors across all available AMD Radeon® Pro outputs is 5.

Supported Graphics APIs OpenGL 4.6
DirectX 12

API support includes:
CUDA C, CUDA C++, DirectCompute 5.0, OpenCL 2.0, Java, Python, and Fortran

Available Graphics Drivers Microsoft Windows 10
Linux®

HP qualified drivers may be preloaded or available from the HP support Web site:
<http://welcome.hp.com/country/us/en/support.html>

*HDMI Flex IO Module does not support discrete graphics and will automatically switch over to Intel® UHD graphics on the Flex IO Module port when inserted into the system. Discrete graphics can be used over HDMI from one of the DP ports with an external DP-to-HDMI dongle.

AMD Radeon™ Pro WX 4150 4GB Graphics

Maximum Resolution DisplayPort™ 1.2:
- up to 4096x2160 x 30 bpp @ 60Hz
- supports High Bit Rate 2 (HBR2) and Multi-Stream Transport (MST)

HDMI 2.0 output*:
- up to 4096x2160 x 30 bpp @ 60Hz

Image Quality Features Stereoscopic 3D display support including NVIDIA® 3D Vision™ technology, 3D DLP, Interleaved, and passive stereo

Display Output Maximum number of displays:
- 5 direct attached monitors

Maximum number of DisplayPort™ displays possible per DisplayPort™ output (Multiple displays daisy-chained from one DisplayPort™ 1.2 port requires DisplayPort™ 1.2 MST capable displays or DisplayPort™ 1.2 MST capable hub):
- 4 1920x1200 @ 60 Hz
- 2 2560x1600 @ 60 Hz
- 1 4096x2160 @ 60 Hz

Maximum number of monitors across all available AMD Radeon® Pro outputs is 5.

Supported Graphics APIs OpenGL 4.5
DirectX 12

API support includes:
CUDA C, CUDA C++, DirectCompute 5.0, OpenCL, Java, Python, and Fortran

Available Graphics Drivers Microsoft Windows 10

QuickSpecs

HP Z2 Mini G4 Workstation

Technical Specifications - Graphics

Linux®

HP qualified drivers may be preloaded or available from the HP support Web site:

<http://welcome.hp.com/country/us/en/support.html>

*HDMI Flex IO Module does not support discrete graphics and will automatically switch over to Intel® UHD graphics on the Flex IO Module port when inserted into the system. Discrete graphics can be used over HDMI from one of the DP ports with an external DP-to-HDMI dongle.

QuickSpecs

HP Z2 Mini G4 Workstation

Technical Specifications - Optical and Removable Storage

HP External Ultra-Slim DVD-RW Drive	Description	External 9.5mm high, tray-load
	Mounting Orientation	Either horizontal or vertical
	Interface Type	USB 2.0
	Dimensions (WxHxD)	144 x 14 x 137.5mm
	Supported Media Types	DVD-RAM DVD+R DVD+RW DVD+R DL DVD-R DL DVD-R DVD-RW CD-R CD-RW
	Disc Capacity	DVD-ROM 8.5 GB DL or 4.7 GB standard
	Access Times	Full Stroke DVD 160ms (typical for Random Stroke)
		Full Stroke CD 140ms (typical for Random Stroke)
	Maximum Data Transfer Rates	CD ROM Read CD-ROM, CD-R Up to 24X CD-RW Up to 24X
		DVD ROM Read DVD-RAM Up to 8X DVD+RW Up to 8X DVD-RW Up to 8X DVD+R DL Up to 8X DVD-R DL Up to 8X DVD-ROM Up to 8X DVD-ROM DL Up to 8X DVD+R Up to 8X DVD-R Up to 8X
Power		Source USB 2.0 DC power
		DC Power Requirements 5 VDC ± 5%-100 mV ripple p-p
Operating Environmental (all conditions non-condensing)	DC Current 5 VDC -< 800 mA typical, <1600 mA maximum	
	Temperature 41° to 104° F (5° to 40° C)	
	Relative Humidity 15% to 80%	
Operating Systems Supported	Maximum Wet Bulb Temperature 84° F (29° C)	
	Windows 10 32-bit and 64-bit, Windows 8 32-bit and 64-bit, Windows 7 Professional 32-bit and 64-bit, Windows Vista Business 64*, Windows Vista Business 32*, Windows Vista Home Basic 32*, Windows 2000, Windows XP Professional or Windows XP Home 32*	
	Linux®	
	No driver is required for this device. Native support is provided by the operating system.	
Kit Contents	HP External Ultra-Slim DVD-RW Drive DVD Writer drive, USB 2.0 type A to mini-B cable. © Copyright 2021 HP Development Company, L.P. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty.	

Technical Specifications - Optical and Removable Storage

HP shall not be liable for technical or editorial errors or omissions contained herein. The information contained herein is subject to change without notice.

Solo Network

QuickSpecs

HP Z2 Mini G4 Workstation

Technical Specifications - Networking and Communications

Integrated Intel® I219LM PCIe GbE Controller (Intel® vPro™ with Intel® AMT 12.0)	Connector	RJ-45
	Controller	Intel® I219LM GbE platform LAN connect networking controller
	Memory	3 KB Tx and 3KB Rx FIFO packet buffer memory
	Data Rates Supported	10/100/1000 Mbps
	Compliance	802.1as/1588, 802.1p, 802.1Q, 802.3, 802.3ab, 802.3az, 802.3i, 802.3u, 802.3z
	Bus Architecture	PCI Express and SMBus
	Data Transfer Mode	PCIe-based interface for active state operation (S0 state) and SMBus for host and management traffic (Sx low power state)
	Power Requirement	Requires 3.3V (integrated regulators for core Vdc)
	Boot ROM Support	Yes
	Network Transfer Mode	Full-duplex; Half-duplex (not supported for the 1000BASE-T transceiver)
Network Transfer Rate	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T (full-duplex) 2000 Mbps	
Management Capabilities	vPro, WOL, auto MDI crossover, PXE, Multi-port teaming, RSS, ACPI, Advanced cable diagnostic, loopback modes, AMT 12.0 support, Circuit Breaker, VLAN, Multicast Listener Discovery (MLD)	

Intel® 9560 Wireless LAN (802.11ac) and Bluetooth 5 Module	Connector	M.2 (Supports 2230 form factor; E Key) Motherboard Interface
	Controller	Intel® Dual Band Wireless-AC 9560
	Compliance	Wireless LAN: IEEE 802.11abgn, 802.11ac, 802.11d, 802.11e, 802.11i, 802.11h, 802.11w, CCX 4.x/CCX Lite, WMM, WPA, WPA2, APS, WPS 2.0, Protected Management Frames Bluetooth®: Dual Mode Bluetooth® 2.1, 2.1+EDR, 3.0, 4.0, BLE, 4.2, and 5
	Bus Architecture	PCI Express Gen3 x1 and USB 2.0
	Power Requirement	Requires 3.3V; 1.65W TDP
Management Capabilities	Wake on WLAN (in all sleep states, excluding Max Power Savings mode), WFA Management Frame Protection (802.11w), vPro/WiAMT Not Currently Supported, F10 BIOS Menu option to disable/enable WLAN and Bluetooth® radios, supports seamless roaming between 802.11 wireless access points	
Throughput	Max PHY throughput 1.73 Gbps (802.11ac) for WLAN	

Allied Telesis 1GbE LC Fiber 2pc Module	Network Interface(s)	1 LC Fiber Connection
	System Interface	PCI Express Gen1.1x1 (via WLAN M.2 interface)
	Network Cable	1GbE over Multimode LC Fiber. Distance is dependent upon network cable: OM1 50/125um 500 MHz:km 550m OM2 62.5/125um 200 MHz:km 275m OM2 62.5/125um 160MHz:km 220m
	Data Rates Supported	1 Gbps

QuickSpecs

HP Z2 Mini G4 Workstation

Technical Specifications - Networking and Communications

LED Indicators	Link/Activity LED (Green): Off = No Link, Solid = Link, Blinking = Activity
Controller	Broadcom BCM57762
Compliance	IEE 802.3z Base1000SX 802.3x (Ethernet Flow Control) 802.1Q (VLANs) 802.1P (Quality of Service) FCC B (USA) CE (European Union) ICES-003 B (Canada) BSMI (Taiwan) VCCI (Japan) KCC (Korea) CTICK (Australia/New Zealand) UL (Safety) RoHS (Restricted or Hazardous Substances)
Power Requirement	2W (Typical)
Operating Temperature	32° to 122° F (0° to 50° C)
Physical Dimensions (LxW)	LC Fiber Board: 37mm x 45mm x 13mm (WxLxH, including connector) Cable: 200mm M.2 Board: 22mm x 30mm x 1.75mm (WxLxH)
Kit Contents	LC fiber board, M.2 board, connecting cable, and 2 screws for attaching the LC fiber board to the motherboard Product Warranty statement and the Installation Guide.

QuickSpecs

HP Z2 Mini G4 Workstation

Technical Specifications – Miscellaneous Features

HP Z2 Mini G4 VESA Sleeve	Mechanical	Dimensions (H x W x D)	Unpackaged	70 mm x 224 mm x 223 mm (2.75 x 8.81 x 8.77 in)
			Packaged	305 x 102 x 289 -mm (12 x 4 x 11.38 in)
	Weight		Unpackaged	1.7 kg (3.7 lb)
			Packaged	2.27 (5.0-lb)
Other	Option kit contents	HP Z2 Mini G4 VESA Sleeve, mounting screws, installation guide, warranty card.		
Limited Warranty	The HP Z2 Mini G4 VESA Sleeve carries a one-year limited warranty. Technical support is available seven days a week, 24 hours a day, online and support forums. Certain restrictions and exclusions apply.			

Technical Specifications – Miscellaneous Features

MISCELLANEOUS FEATURES

Management Features

- Advanced Configuration and Power Management Interface (ACPI). Allows the system to wake from a low power mode. Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system.
- Intel® Wired for Management support; industry wide initiative to make Intel® architecture based PCs, servers and mobile computers more inherently manageable out-of-the-box and over the network PCs, servers and mobile computers more inherently manageable out-of-the-box and over the network
- Dual State Power Button; acts as both an on/off button and a suspend-to-sleep button

Serviceability Features

- Dual colored power LED on front of computer to indicate either normal or fault condition
- Diagnostic LED Explanation Table:
 - Power LED will blink red 2 to 5 times, then blink white 2 or more times, then repeat (with beep tones for each blink initially):
 - 2 red + 2 white User must provide file for BIOS recovery (USB storage typically) + 2 white User must provide file for BIOS recovery (USB storage typically) + 2 white User must provide file for BIOS recovery (USB storage typically)
 - 2 red + 3 white User must enter a key sequence to proceed with recovery by policy + 3 white User must enter a key sequence to proceed with recovery by policy + 3 white User must enter a key sequence to proceed with recovery by policy
 - 2 red + 4 white BIOS recovery is in progress + 4 white BIOS recovery is in progress + 4 white BIOS recovery is in progress
 - 3 red + 2 white Memory could not be initialized + 2 white Memory could not be initialized + 2 white Memory could not be initialized
 - 3 red + 3 white Graphics adaptor could not be found + 3 white Graphics adaptor could not be found + 3 white Graphics adaptor could not be found
 - 3 red + 4 white Power supply failure / not connected + 4 white Power supply failure / not connected + 4 white Power supply failure / not connected
 - 3 red + 5 white Processor not installed + 5 white Processor not installed + 5 white Processor not installed
 - 3 red + 6 white Current processor does not support an enabled feature + 6 white Current processor does not support an enabled feature + 6 white Current processor does not support an enabled feature
 - 4 red + 2 white Processor has exceeded its temperature threshold / system thermal shutdown + 2 white Processor has exceeded its temperature threshold / system thermal shutdown + 2 white Processor has exceeded its temperature threshold / system thermal shutdown
 - 4 red + 3 white System internal temperature has exceeded its threshold + 3 white System internal temperature has exceeded its threshold + 3 white System internal temperature has exceeded its threshold
 - 5 red + 2 white System controller firmware is not valid
 - 5 red + 3 white System controller detected BIOS is not executing
 - 5 red + 4 white BIOS could not complete initialization / PCA failure
 - 5 red + 5 white System controller rebooted the system after a health or recovery timer triggered rebooted the system after a health or recovery timer triggered rebooted the system after a health or recovery timer triggered
- HP PC Hardware Diagnostics UEFI:
 - This utility enables hardware level testing outside the operating system on many components. The diagnostics can be invoked by pressing F2 at POST, and is available as a download from HP Support
- System/Emergency ROM
- Flash ROM
- CMOS Battery Holder for easy replacement
- Flash Recovery with Video Configuration Record Software
- Aux Power LED on System PCA
- Processor ZIF Socket for easy Upgrade
- Over-Temp Warning on Screen (Requires IM Agents)

QuickSpecs

HP Z2 Mini G4 Workstation

Technical Specifications – Miscellaneous Features

- Clear Password Jumper
- DIMM Connectors for easy Upgrade
- Clear CMOS Button
- NIC LEDs (integrated) (Green & Amber)
- Color coordinated cables and connectors
- Tool-less Hood Removal
- Front power switch
- System memory can be upgraded without removing the system board or any internal components
- Tool-less Hard Drive, CD & Diskette Removal
- Green Pull Tabs, and Quick Release Latches for easy Identification

Solo Network

QuickSpecs

HP Z2 Mini G4 Workstation

Summary of Changes

Date of change:	Version History:		Description of change:
September 19, 2018	From v1 to v2	Changed	Supported components, System Configurations and Technical Specifications – Graphics sections, format changes
May 7, 2019	From v2 to v3	Added	Footnote to the HP Z2 Mini G4 Performance, back view section
May 9, 2019	From v3 to v4	Changed	Callouts section
May 20, 2019	From v4 to v5	Removed	RAID support
May 28, 2019	From v5 to v6	Added	Processors Refresh
June 12, 2019	From v6 to v7	Changed	Storage section
July 23, 2019	From v7 to v8	Removed	Integrated hood sensor from Security Management section
July 30, 2019	From v8 to v9	Removed	Support for chassis padlocks and cable lock devices from Security Management section
September 1, 2019	From v9 to v10	Added	HP Z Turbo Drive G2 256, 512GB and 1TB SED TLC (Z2Mini G4) to Storage section
October 26, 2019	From v10 to v11	Changed	Graphics section
November 2, 2019	From v11 to v12	Changed	System Board section
November 5, 2019	From v12 to v13	Changed	Processors section
December 5, 2019	From v13 to v14	Changed	Power Supply section
February 20, 2020	From v14 to v15	Changed	Processors Matrix and Memory section
April 23, 2020	From v15 to v16	Changed	Other Hardware section
July 18, 2020	From v16 to v17	Changed	Graphics and Racking and Physical Security section
January 5, 2021	From v17 to v18	Changed	Processors, Racking and Physical Security, Operating Systems and Hard Drives sections
October 1, 2021	From v18 to v19	Changed	Input Devices section

QuickSpecs

HP Z2 Mini G4 Workstation

© 2021 HP Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. Intel, Intel Core, Pentium, Thunderbolt, vPro and Xeon are trademarks of Intel Corporation in the U.S. and other countries. Microsoft and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. ENERGY STAR® is a registered trademark owned by the U.S. Environmental Protection Agency. Linux® is the registered trademark of Linus Torvalds in the U.S. and other countries. NVIDIA®, Quadro and the NVIDIA logo are trademarks and/or registered trademarks of NVIDIA Corporation in the U.S. and other countries. Red Hat® is a registered trademark of Red Hat, Inc. in the United States and other countries. Bluetooth is a trademark of its proprietor used by HP Inc. under license. DisplayPort™ and the DisplayPort™ logo are trademarks owned by the Video Electronics Standards Association (VESA®) in the United States and other countries.

Solo Network